

(19)



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11)

EP 0 923 398 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:

14.11.2001 Bulletin 2001/46

(51) Int Cl.7: **A61M 25/00**

(86) International application number:
PCT/DK97/00396

(21) Application number: **97918923.0**

(22) Date of filing: **18.09.1997**

(87) International publication number:
WO 98/11932 (26.03.1998 Gazette 1998/12)

(54) **A READY-TO-USE URINARY CATHETER ASSEMBLY**

EIN GEBRAUCHSFERTIGES BLASENKATHETER-SET

ENSEMBLE CATHETER URINAIRE PRET A L'EMPLOI

(84) Designated Contracting States:

**AT BE CH DE DK ES FI FR GB GR IE IT LI LU MC
NL PT SE**

Designated Extension States:

AL LT LV RO SI

- **TANGHOJ, Allan**
DK-2980 Kokkedal (DK)
- **NOSTED, Ulrik**
DK-2800 Lyngby (DK)
- **TORSTENSEN, Jan**
DK-2830 Virum (DK)

(30) Priority: **18.09.1996 DK 102396**
01.11.1996 DK 122496

(43) Date of publication of application:
23.06.1999 Bulletin 1999/25

(60) Divisional application:
01114582.8 / 1 145 729

(73) Proprietor: **COLOPLAST A/S**
3050 Humlebaek (DK)

(72) Inventors:

- **KAYEROD, Helle**
DK-2200 Copenhagen N (DK)

(74) Representative: **Frederiksen, Jakob Pade et al**
Plougmann, Vingtoft & Partners
Sankt Annae Plads 11
P.O. Box 3007
1021 Copenhagen K (DK)

(56) References cited:

EP-A- 0 677 299 **WO-A-96/30277**
GB-A- 1 600 963 **GB-A- 2 284 764**
US-A- 3 967 728

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

[0001] This invention relates to at least one urinary catheter assembly comprising a urinary catheter having on at least a part of its surface a hydrophilic surface layer intended to produce a low-friction surface character of the catheter by treatment with a liquid swelling medium prior to use of the catheter and a catheter package having a cavity for accommodation of the catheter.

[0002] Urinary catheters of the kind to which the invention pertains are known, inter alia, from EP-A-0 217 771, EP-A-0 586 324 and WO 94/16747, whereas various forms of catheter packages are known from US-A-3,035,691, US-A-3,648,704, US-A-3,967,728, US-A-4,204,527, US-A-4,269,310, US-A-4,379,506, US-A-5,454,798, GB-A-2,284,764, DE-A-2,317839, EP-A-0 677 299 and DK Design Registration No. 0932 1986.

[0003] US-A-3,648,704, US-A-3,967,728, US-A-4,269,310, GB-A-2,284,764 and EP-A-0 677 299 disclose a conventional urinary catheter assembly comprising a catheter of the kind where prior to insertion of the catheter into the urethra the tip of the catheter is to be lubricated with a gel-like lubricant and a package where such a lubricant is accommodated in a rupturable pouch connected with or located within the package itself adjacent to the tip of the catheter or supplied together with the catheter package for connection therewith prior to use of the catheter.

[0004] An important feature of any urinary catheter used for intermittent catheterisation of the bladder of an incontinent user is the ability of the catheter to slide easily through the urethra without exposing the urethral walls to any risk of damage. Catheters of the kind to which the invention pertains have been developed to meet this need by imparting an extremely low friction character to at least the part of the surface of the catheter which is actually introduced into the urethra. The low friction surface character is obtained by incorporating into the relevant part of the catheter at least a hydrophilic surface layer, typically in the form of a coating, and exposing this layer or coating to contact with a liquid swelling medium immediately prior to use.

[0005] In order to maintain the low friction surface character during location of the catheter in the urethra and subsequent withdrawal therefrom and hereby reduce stinging pain it is further known to incorporate an osmolality promoting agent, such as NaCl, in the hydrophilic coating.

[0006] When catheters of this kind are used directly by end users outside the medical environment of a hospital or a clinic, e.g. by or tetraplegic patients who often have a very poor dexterity, and therefore need a very simple insertion procedure, the most common liquid swelling medium used for preparation of the catheter immediately prior to use would be normal tap water.

[0007] In order to reduce the risk of infection inherent with the performance of intermittent catheterisation of the bladder both the actual swelling medium used and the

environment in which the catheterisation is performed need, however, to be as clean and antiseptic as possible. Evidently, this need may be very difficult to meet in many daily life situations, as where catheterisation must be performed outside the user's normal daily environment, e.g. in public toilets, where neither the water supply nor the general state of cleanliness can be expected to be of a sufficiently high standard. Moreover, many disabled users have severe difficulties in entering available toilet rooms due to simple physical barriers like narrow access ways, stairs and the like.

[0008] On this background, it is the object of the invention to improve and facilitate the performance of intermittent urinary catheterisation in any type of environment by providing a ready to use urinary catheter assembly comprising a catheter which can be withdrawn from its package and is prepared for direct insertion in the urethra and in a substantially sterile condition, whereby the general quality of life for users of intermittent catheterisation would be greatly improved.

[0009] In order to meet this and other objects of the invention, as set forth in the following, a urinary catheter according to the invention is characterised in that the package includes a compartment having walls of a gas impermeable material, said compartment accommodating said liquid swelling medium for provision of a ready-to-use catheter assembly.

[0010] The term "gas impermeable" material should be understood in this context to mean any material that will be sufficiently tight against diffusion by evaporation of the actual liquid swelling medium for a period exceeding the recommended shelf life time of the catheter assembly which could be up to five years, typically 36 months.

[0011] In a first series of embodiments of the urinary catheter assembly of the invention the catheter package as a whole is made of a gas impermeable material and the compartment for the liquid swelling medium is in liquid flow communication with the cavity for accommodation of the catheter.

[0012] In one preferred embodiment of this kind the catheter package may be formed from two sheets of gas impermeable film material connected with each other by a gas impermeable joint defining said compartment and the cavity for accommodating the catheter.

[0013] Thereby, the preparation of the catheter with the liquid swelling medium prior to use can be made very simple by application of a pressure to the walls of the compartment, whereby the liquid swelling medium will be transferred to the cavity, which may have a cross section narrowly surrounding the catheter, to activate the hydrophilic surface layer of the catheter.

[0014] The compartment for the liquid swelling medium may be entirely integrated with the cavity for the catheter, whereby the hydrophilic surface layer of the catheter will be activated immediately after completion of the production process, when the swelling medium has been introduced in the package. The gas-imperme-

able walls of the package will then protect the activated coating from drying out and provide a long time preservation of the low friction surface characteristic of the catheter until the moment of actual use.

[0015] It may be preferred, however, to separate the compartment for the swelling medium from the catheter cavity and provide the liquid flow communication as a relatively narrow passage to confine the swelling medium in the compartment until activation of the hydrophilic surface coating of the catheter is required immediately prior to use of the catheter.

[0016] To achieve this the liquid swelling medium may advantageously be confined in a storage body arranged in said compartment and made of a material which is able to serve as a storage for the liquid swelling medium and can discharge therefore the swelling medium by a simple physical action such as the application of an external pressure or squeezing effect. Such a material may typically be a spongy material or an absorbing gel.

[0017] The joint between the two sheets of film material of the package may advantageously be a welded joint which may be formed to allow easy opening of the package for withdrawal of the prepared catheter.

[0018] Such a welded joint may comprise a part provided between said compartment and said cavity as a peelable joint permitting separation of said compartment from said cavity after transfer of said liquid swelling medium from said compartment to said cavity for withdrawal of the catheter from the package.

[0019] Alternatively, such a welded joint may comprise a part at the end of the package remote from said compartment providing a peel-off joint to separate said sheets from each other for withdrawal of said catheter from the package.

[0020] In other embodiments of the type in which the compartment for the swelling medium is in liquid flow communication with the catheter cavity the package may comprise a first generally tubular part defining said cavity to narrowly surround the catheter and a second generally tubular part defining said compartment.

[0021] Embodiments of this type are quite simple and cheap in production. Typically, the first and second tubular parts may be integrally formed from an elongate hose-like member, one end section of which is expanded to constitute said second tubular part.

[0022] In a second series of embodiments, the compartment for the swelling medium is separated from the cavity for accommodation of the catheter, and the swelling medium is confined in said compartment in a liquid state until the intended use of the catheter.

[0023] In one embodiment of this type, the compartment for the swelling medium may be formed by a container arranged around a proximal part of said catheter not provided with said hydrophilic layer, said catheter passing through said container via sealed openings, said catheter and said container being arranged in said package to allow said catheter to be drawn through said container by withdrawal of the catheter from the pack-

age.

[0024] In order to reduce the amount of liquid swelling medium required for activation of the hydrophilic surface coating of the catheter, the latter may advantageously be provided with means preventing said swelling medium from getting into contact with internal or external surface parts of the catheter not provided with said hydrophilic layer for an activation period during which said medium is applied to the surface part provided with said hydrophilic layer.

[0025] In the following, the invention will be explained in more detail by means of various embodiments illustrated in the accompanying drawings, in which

figures 1 and 2 are an upper plan view and a cross-sectional view, respectively, of a first embodiment of a urinary catheter assembly according to the invention;

figure 3 shows a modification of the embodiment in figs. 1 and 2;

figures 4 and 5 are a side view and a cross-sectional view, respectively, of a second embodiment;

figure 6 shows a modification of the embodiment in figs 4 and 5;

figures 7 and 8 are upper plan views of a third and fourth embodiment, respectively;

figures 9 and 10 are side views of a fifth and a sixth embodiment, respectively;

figure 11 is a side view of a seventh embodiment;

figure 12 is a plan view of an eighth embodiment;

figure 13 illustrates a part of a catheter provided with means to reduce the amount of liquid swelling required for activation of a hydrophilic surface coating; and

figures 14 to 28 are representations of a number of further embodiments of the urinary catheter assembly of the invention.

[0026] In the embodiment shown in figs. 1 and 2 the urinary catheter assembly of the invention is intended for intermittent catheterisation of the bladder of a user and comprises a urinary catheter 1 having a catheter tube 2 with cross-sectional and longitudinal dimensions suitable for introduction of the catheter through the urethra.

[0027] The catheter tube 2 extends from a distal inlet end 3, in which urine inlet openings 4 are provided, towards a proximal end, at which the catheter tube is connected with an outlet member 5 designed for connection of the catheter with a hose member (not shown) for transport of urine withdrawn from the bladder to a urine collection bag (not shown).

[0028] On a substantial part of its length from the distal end the catheter tube is, in the illustrated embodiment, coated on its external surface with a hydrophilic surface coating 6 of a kind known per se, which by preparation with a liquid swelling medium prior to use of the catheter provides an extreme low friction character of the catheter surface to enable the catheter to slide very

easily through the urethra without exposing the urethral walls to any risk of damage. A hydrophilic surface layer may, however, be provided by other means and may include a catheter tube of which the active part to be located in the urethra is made entirely of a hydrophilic material.

[0029] The catheter 1 is accommodated in its entirety in a package 7 formed by two sheets 8 and 9 of a gas-impermeable thermoplastic film material such as a multiple layer film material comprising e.g. aluminium, welded together along a welding seam 10 which constitutes a joint defining a cavity 11 narrowly surrounding the catheter tube 2 and a widened end section 12 joining the cavity 11 through a transitional section 13 matching the external dimensions of the outlet or connector member 5.

[0030] The widened end section 12 forms a compartment for accommodation of the liquid swelling medium which is to be used for preparation of the catheter by activation of the low friction surface character of the hydrophilic surface coating 6. The liquid swelling medium may be any liquid suitable for this purpose and may typically comprise an isotonic or non-isotonic aqueous solution e.g. of sodium chloride or sterile water.

[0031] In order to maintain the swelling medium in liquid state until the actual preparation of the catheter the liquid swelling medium is confined in the embodiment shown in a storage body 14 which as described above may be of a spongy or gel-like material located in the compartment or end section 12.

[0032] The catheter 1 and the spongy body 14 may both be arranged in the package 7 in a sterile or antiseptic condition prior to welding the two sheets 8 and 9 of film material together to form the finished urinary catheter assembly.

[0033] Prior to the intended use of the catheter 1 the hydrophilic surface coating 6 is prepared to activate its low friction character by applying an external pressure to the end section or compartment 12 to squeeze the liquid swelling medium out from the spongy body and allow it to flow into the cavity 11. Since the welding seam 10 is arranged to provide a narrow cavity 11 around the catheter tube 2 the amount of swelling liquid needed for preparation of the hydrophilic coating 6 can be kept sufficiently low to be easily accommodated in the body 14 of spongy material. Experiments have verified that by suitable design of the cavity the amount of swelling liquid may be reduced to a volume of 2 to 50 ml, preferably 2 to 15 ml for female catheters and 5 to 30 ml for male catheters.

[0034] The period needed for preparation of the hydrophilic surface coating 6 will typically be about 30 seconds and subsequently the catheter 1 may be withdrawn from the package 7 in a ready to use condition.

[0035] To facilitate withdrawal of the catheter 1 from the package 7 the welding joint may in the transitional section 13 comprise a part forming a tear-off joint 15 permitting the entire end section or compartment 12 to be

separated from the package 7, whereby the catheter 1 may as a whole be withdrawn from the package by gripping the outlet or connector member 5 only, while maintaining the catheter tube 2 in a sterile condition for insertion into the urethra with a minimum risk of infection.

[0036] As another possibility for easy withdrawal of the prepared catheter 1 from the package 7 the welding joint may, as illustrated in figure 3, comprise a part 10a adjacent the distal end of the catheter tube providing a peel-off joint permitting easy separation of plastic film sheets 8 and 9. Thereby, the package 7 itself will serve as an applicator to be gripped by the user to permit introduction of the catheter tube without contamination.

[0037] Due to the gas-impermeability of the package 7 it is not necessary to use a body 14 of spongy material to accommodate the liquid swelling medium. The swelling medium may be introduced in the package during the assembling operation prior to completion of the welding and will thereby immediately prepare the hydrophilic coating. The package will itself prevent the coating from drying out and preserve the low friction character of the surface coating to keep the catheter in a ready to use condition at all times. This would have the inherent advantage that no preparation step is required immediately prior to use, whereby the operation will be reduced to opening of the package 7 for immediate withdrawal of the catheter without the delay resulting from the required preparation period.

[0038] Since the preparation period is very short and the possible presence of surplus swelling liquid in the package may be uncomfortable to the user who in many situations will have to carry one or more catheter assemblies with him or her, it would frequently be preferred, however, to keep the swelling medium confined in the spongy body 14 until the moment of actual use.

[0039] In the alternative embodiments to be described in the following the catheter 1 may be of the same design as described above and will therefore not be explained in further detail.

[0040] In the embodiment shown in figs. 4 and 5 the package 16 is made up, in general, of a first generally tubular part 17 defining a cavity 18 which narrowly surrounds the catheter 1 and a second generally tubular part 19 defining the compartment for accommodation of the catheter outlet or connector member 5 and the spongy body 14 in which the swelling liquid is confined.

[0041] The tubular parts 17 and 19 may be integrally formed from an elongate hose-like member, one end section of which is expanded to form the compartment 19. Thereby, the package 16 may be produced from a relatively inexpensive standard hose product and the welding operation required for the embodiments in figs. 1 to 3 can be avoided. Such standard hose products would normally have a flexibility sufficient to allow the swelling liquid to be squeezed out of the spongy body 14 by the mere application of an external pressure to the compartment 19.

[0042] For easy withdrawal of the catheter 1 from the

package 16 after preparation of the hydrophilic coating the package may include a fracture defining segment 20 provided at the transitional region between the first and second tubular parts 17 and 19 of the package.

[0043] As an alternative possibility the compartment 19 may be formed with an open proximal end closed by a removable plug-like closure member 21 which should preferably engage the spongy body 14 for removal thereof together with the closure member and provide access to the catheter outlet or connector member 5.

[0044] The embodiment shown in figs. 4 and 5 may be modified as shown in figure 6 by designing the first and second tubular parts 22 and 23, respectively, as separate parts which are detachably connected with each other by a coupling member 24 providing a gas-impermeable seal against both of the tubular parts 22 and 23.

[0045] Whereas, in the embodiments described so far the compartment for the liquid swelling medium is in direct liquid flow communication with the cavity narrowly surrounding the catheter tube, which requires the package as a whole to be made of a gas-impermeable material, the compartment for the swelling liquid may alternatively be separated from the catheter cavity in such a way that the liquid flow communication there between is not established, until preparation of the catheter is performed prior to the intended use. Thereby, only the swelling medium compartment itself needs to have walls of a gas-impermeable material preventing leakage of the swelling medium by diffusion, whereas the wall parts of the package surrounding the catheter may be made of a relatively cheaper liquid tight material.

[0046] Figure 7 shows schematically a fourth embodiment of the catheter assembly of the invention, in which the compartment for the swelling liquid is formed by a pouch-like container 25 arranged around the proximal part 26 of the catheter tube 2 outside the hydrophilic coating 6. The catheter tube passes through the container 25 via sealed openings 27 and 28. The catheter 1 and the pouch-like container 25 are arranged together in the package 29 which may be made from two sets of plastic film material welded together in a way somewhat similar to the embodiments shown in figs. 1 to 3. Preferably, such a package would be designed for peel-off separation of the two sheets from the proximal end 30 to permit withdrawal of the catheter 1 by gripping the catheter outlet or connector member 5. During the withdrawal movement the catheter tube 2 will be drawn through the pouch-like container 25, whereby the swelling liquid will be applied directly to the hydrophilic coating 6.

[0047] In the container 25 the swelling liquid may be confined in a spongy material in the same way as in the embodiments described above.

[0048] Whereas the container 25 is shown in figure 7 to be loosely arranged in the package 29, such a container 31 for swelling liquid may also as shown in figure 8 be secured to one part 32 of a generally tubular pack-

age having a second part 33 connected with the part 31 and the container 30 by a welding providing a tear-off facility to allow easy separation of the second part 33 from the package for withdrawal of the catheter 1.

[0049] In figure 9 an embodiment is shown with a package 34 for the catheter assembly having a general configuration similar to the package 7 for the embodiment in figs. 1 and 2 apart from the fact that also in this case the package need not be made of a gas-impermeable film material. The compartment for the swelling liquid is formed by a compressible ampoule 35 arranged in the widened end section 36 of package 34.

[0050] The ampoule 35 has an outlet part 37 communicating with the opening of the catheter outlet or connector member 5 and being closed by relatively faintly adhering joint 38 which by application of a pressure to the ampoule 35 without opening the package 34 will be opened to allow the swelling liquid to flow through the catheter tube 2 and the distal inlet openings 4 thereof towards the cavity 39 narrowly surrounding the part of the catheter tube 2 provided with the hydrophilic coating 6.

[0051] In figure 10 an embodiment is shown in which the swelling liquid is likewise accommodated in a compressible ampoule 40 which is arranged, however, in a separate container part 41 of a two-part container 42 the other part 43 of which defines the cavity for accommodation of the catheter 1 and is in direct liquid flow communication with the outlet part 44 of the ampoule 40. The function of the ampoule 40 in connection with preparation of the hydrophilic catheter coating 6 is generally the same as for the embodiment in figure 9, but as a result of the location of the ampoule outlet part 44 in the narrow flow passage 45 between container parts 41 and 43 the swelling liquid will be transferred directly through the cavity to the hydrophilic coating 6 on the external side of the catheter tube 2.

[0052] In figure 11 another design of a package in the form of a two part container 46 is shown, wherein the compartment 47 for the swelling liquid is separated from the container part 48 forming the catheter cavity by means of a common closure for the two container parts 47, 48 formed by a sheet member 49 of gas-impermeable film material. The sheet member 49 is connected with a transition part 50 of the package between container parts 47, 48 by a relatively faintly adhering peel-off joint, whereas along all other edge parts of the open container parts 47, 48 there is a relatively strong adhering joint with the common closure sheet 49. By separating the sheet member 49 from container parts 47, 48 the peel-off joint at the transition part 50 may be opened, while maintaining the joint at all other edge parts the compartment formed by container part 47 may be brought into liquid flow communication with the container part 48 accommodating the catheter 1.

[0053] In figure 12 a further development of the embodiment shown in figure 9 is illustrated in which the package 51 is formed integrally with a urine collecting

bag 52. For disabled users like paraplegics or tetraplegics who as described in the foregoing may have severe difficulties in entering available toilet rooms such an integration of the urine collecting bag with the catheter package is a significant practical advantage making the use of the catheter totally independent of the availability of a toilet room. The catheter 1 is located in a relatively narrow tapering part 53 joining the collection bag 52 and the compartment for the swelling liquid is formed by a compressible ampoule 54 arranged in flow communication with the catheter outlet or connector member 5. In this case, the catheter 1 will in use not be completely removed from package 51. Instead the distal end of the tapering part 53 may be opened by peel-off separation of two plastic film sheets from which the package 51 is composed. Thereby, the catheter 1 may after preparation of the hydrophilic coating be introduced by an operation similar to the one described above for the embodiment in figure 3.

[0054] Due to the desirability of limiting the amount of swelling liquid to be contained in the swelling liquid compartment in those embodiments where the swelling liquid is transferred directly through the cavity narrowly surrounding the catheter tube 2 to the hydrophilic coating 6, i.e. without having to flow internally through the catheter tube 2 and through the catheter inlet openings 4, the catheter may be provided with means preventing the swelling liquid from getting into contact with internal or external surface parts of the catheter 1 not provided with the hydrophilic coating 6, during the period needed for preparation of the hydrophilic coating to activate its low friction character. Such means may in a simple manner comprise the application of a film layer 55 of a material soluble by the actual swelling medium to said internal or external surface parts.

[0055] As shown in figure 13 this may be done in the most simple way by application of such film layers 55 over the catheter inlet openings 4. Thereby, substantially the entire quantity of swelling medium will be effectively used for the preparation of the hydrophilic surface coating.

[0056] In figure 14 a modification of the embodiment shown in figure 12 is shown, in which a compressible ampoule 54' is loosely arranged in the urine bag part 52' of the catheter package 51'. At one end, the ampoule 54' is closed by a breakable closure device 55, which can be broken off by manipulation through the walls of the bag 52'.

[0057] In figures 15 and 16, an embodiment is shown, in which the compartment for the liquid swelling medium is formed as a rupturable pouch 56 and is arranged in the cavity 57 for the catheter 58 in liquid flow communication with an outlet member 59 connected with the catheter 58 at the proximal end thereof. An outlet part 61 of the ampoule is provided at the end of the pouch facing the catheter outlet member 59. The outlet part 61 is closed by a rupturable closure in the form of a welding 62 providing a relatively faint joint, which will be ruptured

by applying pressure on the pouch 56 by squeezing without opening the catheter package. This embodiment is very easy to operate by a user having poor dexterity.

[0058] In the embodiments to be described in the following the compartment for the swelling medium is formed by a relatively rigid container arranged within the catheter package in extension of an outlet member provided at the proximal catheter end.

[0059] In the embodiment shown in figures 17 and 18 this container is formed as a relatively flat box 63 which at an end facing the catheter outlet member 64 is closed by a closure in the form of a rupturable membrane 65, connected with an operating device permitting rupturing of the membrane without opening the catheter package.

[0060] In the embodiment shown this operating device comprises a rod-like member 66 connected with the membrane 65 and extending throughout the length of the box-shaped container 64 and through an end wall 67 of the catheter package to a gripping member 68, which can be operated by the user to rupture the membrane 65, whereby the swelling medium content in the container 63 will flow through the catheter 69 in the manner described in the foregoing.

[0061] As illustrated in figure 18, a particular easy operation may be obtained, if the gripping member 68 is formed as a ring, which will allow the catheter package as a whole to be hung on a hook 70 or similar device, which is normally available in a toilet or bathroom. Operation of the package to effect treatment of the hydrophilic surface part of the catheter 69 may then be effected by pulling the entire package hung on such a hook.

[0062] In the modification illustrated in figures 19 and 20, a compartment in the form of a flat box-like container 71 somewhat similar to the container 63 shown in figures 18 and 19, is formed with an open end 72 facing the catheter outlet member 73. A sealing closure between the compartment accommodating the liquid swelling medium and the catheter cavity 74 of the package is obtained by means of an external clamp 75 squeezing the walls of the catheter package 76 together. Thereby, the treatment of the hydrophilic surface part of the catheter 77 can simply be effected by removing the clamp 75.

[0063] In the embodiment shown in figures 21 and 22, a rigid container compartment 78 for the liquid swelling medium has a generally conical shape and is formed integrally with the catheter outlet member 79 in extension thereof. Between the outlet member 79 and the container 78 a fracture region 80 is provided allowing the container 78 to be easily broken off from the catheter outlet member 79, whereby a liquid-tight closure in the form of a membrane 80a closing the end of the container 78 facing the outlet member 79 will automatically be ruptured to allow the content of liquid swelling medium in the container 78 to flow through the catheter 81 to effect treatment of the hydrophilic surface part thereof.

[0064] In figures 23 and 24, an embodiment is illus-

trated in which an ampoule 82 accommodating the liquid swelling medium is arranged within the catheter package in extension of the catheter outlet member 83. The ampoule 82 is connected with an operation member 84 through a connecting assembly 85 comprising a plug-like closure member 87 formed integrally with the operation member 84 and pivotally connected with a collar member 86 secured to the ampoule 82, whereby the ampoule 82 can be pivoted with respect to the operation member 84, by gripping the latter together with the catheter outlet member without opening the package, to assume the position shown in dashed lines, whereby the closure 87 will be removed from the ampoule to allow the liquid swelling medium to flow out and effect treatment of the hydrophilic surface part of the catheter 88.

[0065] In figure 25, a modification of the embodiment in figures 23 and 24 is shown, in which an ampoule 89 for the liquid swelling medium is closed by a rupturable membrane 90 and is connected with an operation member 92, which in the package is located opposite the end of the catheter outlet member 91 and is formed, on its inner side facing the membrane 90, with a rupturing projection 93. The operation member 92 is arranged to be displaceable on a neck part of the ampoule 89 and is normally held thereon in an inactivated position, in which the rupturing projection 93 is removed from the membrane 90, by means of projecting pins 94 engaging a recess 94a formed in the operation member 92. The membrane 90 can be ruptured by the rupturing projection 93 without opening the catheter package by operating the catheter outlet member 91 to push the operation member 92 with respect to the ampoule neck part 94.

[0066] In a further modification illustrated in figure 26, an ampoule 95 closed by a rupturable membrane 96 is connected with the catheter outlet member 97 by an operation member comprising two pitally interconnected parts 98 and 99 connected with outlet member 97 and ampoule 95, respectively. Operation member part 98 is formed with a rupturing projection 100 for membrane 96. Activation of the ampoule 95 by rupturing the membrane 96 may be effected without opening the catheter package by pivoting the ampoule 95 with respect to the catheter outlet member 97 from the supply position shown in solid lines, in which the ampoule 95 extends parallel with respect to the catheter, to the activation position shown in dashed lines.

[0067] In the embodiment shown in figures 27 and 28, the catheter package 101 providing the cavity for the catheter 102 is closed at the end opposite the catheter outlet member 103 by a rigid end wall 104 and the compartment for the liquid swelling medium is formed by an external rigid container 105 arranged outside the package itself against the end wall 104. As illustrated, the container 105 is arranged to be turnable through approximately 90° with respect to the end wall 104 to bring liquid outlet and inlet openings provided in an end wall 106 of the container 105 facing the rigid end wall 104 and in the latter end wall, respectively, into liquid flow

alignment, whereby the content of liquid swelling medium in the ampoule 105 will be transferred to the catheter package to effect treatment of the hydrophilic surface part of the catheter 102.

[0068] Whereas different embodiments of ready to use urinary catheter assemblies according to the invention have been described in the following the invention is not limited to the specific characteristics of these embodiments, but will include numerous modifications without departing from the scope of the patent claims.

[0069] Thus, a catheter assembly according to the invention may well comprise a number of catheters packed in individual packings each comprising a compartment for swelling liquid and all arranged in a common package providing the prescribed gas impermeability.

Claims

1. A urinary catheter assembly comprising at least one urinary catheter (1) having on at least a part of its surface a hydrophilic surface layer (6) intended to produce a low-friction surface character of the catheter by treatment with a liquid swelling medium prior to use of the catheter and a catheter package (7, 16, 29, 34, 42, 46, 51, 51') having a cavity (11, 18, 39, 48, 53) for accommodation of the catheter (1, 58, 69), **characterized in that** the package (7, 16, 29, 34, 42, 46, 51, 51') includes a compartment (12, 19, 25, 30, 35, 40, 47, 54, 54', 56, 64, 71, 78, 82) having walls of a gas impermeable material, said compartment accommodating said liquid swelling medium for provision of a ready-to-use catheter assembly.
2. A urinary catheter assembly as claimed in claim 1, **characterized in that** the catheter package (7, 16) as a whole is made of a gas impermeable material and that said compartment (12, 19) is in liquid flow communication with the cavity (11, 18) for accommodation of the catheter.
3. A urinary catheter assembly as claimed in claim 2, **characterized in that** the catheter package (7) is formed from two sheets (8, 9) of gas impermeable film material connected with each other by a gas impermeable joint (10) defining said compartment (12) and the cavity (11) for accommodating the catheter (1).
4. A urinary catheter assembly as claimed in claim 3, **characterized in that** the catheter package (7) is of a general elongate shape with said joint (10) arranged to define said cavity (11) to accommodate the catheter (1) in a substantially linear orientation.
5. A urinary catheter assembly as claimed in claim 3

- or 4, **characterized in that** said cavity constitutes itself said compartment to effect said treatment of the catheter immediately following introduction of said swelling medium in said compartment, said package permitting thereby long-time preservation of the low-friction surface of the catheter in a pre-treated form.
6. A urinary catheter assembly as claimed in claim 3 or 4, **characterized in that** said joint (10) is arranged to provide said cavity (11) with a cross-section narrowly surrounding the catheter (1).
 7. A urinary catheter assembly as claimed in any of claims 3, 4 or 6, **characterized in that** said compartment (12) is provided at one end of said cavity (11).
 8. A urinary catheter assembly as claimed in claim 7, **characterized in that** said liquid swelling medium is confined in a storage body (14) arranged in said compartment (12).
 9. A urinary catheter assembly as claimed in claim 8, **characterized in that** the catheter package includes a transitional section (13) between said cavity (11) and said compartment for accommodation of a proximal outlet and/or connector member (5) of the catheter (1).
 10. A urinary catheter assembly as claimed in any of claims 3 to 9, **characterized in that** said joint (10) is a welding joint.
 11. A urinary catheter assembly as claimed in claim 10, **characterized in that** said welding joint (10) comprises a part (15) provided between said compartment (12) and said cavity (11) as a tear-off joint permitting separation of said compartment (12) from said cavity (11) after transfer of said liquid swelling medium from said compartment to said cavity for withdrawal of the catheter (1) from the package (7).
 12. A urinary catheter assembly as claimed in claim 10, **characterized in that** said welding joint (10) comprises at least a part (10a) at the end of the package remote from said compartment (12) providing a peel-off joint to separate said sheets (8, 9) from each other for withdrawal of said catheter (1) from the package (7).
 13. A urinary catheter assembly as claimed in claim 2, **characterized in that** said package (16) comprises a first generally tubular part (17) defining said cavity (18) to narrowly surround the catheter (1) and a second generally tubular part (19) defining said compartment.
 14. A urinary catheter assembly as claimed in claim 13, **characterized in that** said first and second tubular parts (17, 19) are integrally formed from an elongate hose-like member, one end section of which is expanded to constitute said second tubular part (19).
 15. A urinary catheter assembly as claimed in claim 14, **characterized in that** a fracture defining segment (20) is provided in said hose-like member in a transitional region between said first and second tubular parts (17, 19) to allow separation of said compartment (19) from said cavity (18) for withdrawal of the catheter (1).
 16. A urinary catheter assembly as claimed in claim 13, **characterized in that** said first and second tubular parts (22, 23) are separate parts which are detachably connected with each other to allow separation of said compartment (23) from said cavity for withdrawal of the catheter (1).
 17. A urinary catheter assembly as claimed in any of claims 13 to 16, **characterized in that** said liquid swelling member is confined in a storage body (14) arranged in said second tubular part (19, 23).
 18. A urinary catheter as claimed in any of claims 13 to 17, **characterized in that** said second tubular part (19) is provided with a detachable end closure member (21).
 19. A urinary catheter assembly as claimed in claim 1, **characterized in that** said compartment (25, 31, 35, 40, 47, 54, 54', 56, 64, 71, 78, 82, 89, 95,, 105) is separated from the cavity (39, 48, 53) for accommodation of the catheter (1), said swelling medium being confined in said compartment (25, 31, 35, 40, 47, 54, 54', 56, 64, 71, 78, 82, 89, 95, 105) in a liquid state until the intended use of the catheter.
 20. A urinary catheter assembly as claimed in claim 19, **characterized in that** said compartment (25, 31) is formed by a container arranged around a proximal part (26) of said catheter (1) not provided with said hydrophilic coating (6), said catheter passing through said container via sealed openings (27, 28), said catheter (1) and said container (25) being arranged in said package (29, 32) to allow said catheter (1) to be drawn through said container (25, 31) by withdrawal of the catheter from the package.
 21. A urinary catheter assembly as claimed in claim 19, **characterized in that** said cavity and said compartment is formed by separate containers (47, 48) of film material closed by a common sheet member (49) of a gas impermeable film material connected with said containers by a joint which in a region (50) of said sheet member (49) arranged between said

- containers (47, 48) provides a relatively faintly adhering first peel-off joint, said joint providing along other edge parts of said containers a relatively strong adhering second joint to allow separation of said sheet member (49) from said containers (47, 48) in said region to provide a liquid flow communication from said compartment (47) to said cavity (48).
22. A urinary catheter assembly as claimed in claim 19, **characterized in that** said compartment is formed by an ampoule (35, 40, 54, 54', 56, 64, 71, 78, 82, 89, 95, 105) having an outlet part (37, 44) closed by a releasable closure (55).
23. A urinary catheter assembly as claimed in claim 22, **characterized in that** said ampoule (35, 40, 54, 54', 56) is compressible and arranged with said outlet part (37, 44) communicating with a proximal opening of said catheter.
24. A urinary catheter assembly as claimed in claim 22 or 23, **characterized in that** said ampoule (35, 40, 54, 54') is arranged together with said catheter (1) in said package (34, 42, 51, 51'), said closure being openable without opening said package to bring said swelling medium into treatment contact with at least said hydrophilic surface layer of the catheter (1).
25. A urinary catheter assembly as claimed in claim 23 or 24, **characterized in that** said closure is formed by a relatively faintly adhering joint (38), which can be opened through application of a pressure to said ampoule to allow said liquid swelling medium to flow through the catheter (1) and through at least one opening (4) at the distal end thereof towards the surface part having said hydrophilic coating (6).
26. A urinary catheter assembly as claimed in any of the preceding claims, **characterized in that** the catheter (1) is provided with means preventing said swelling medium from getting into contact with internal or external surface parts of the catheter not provided with said hydrophilic coating (6) for an activation period during which said medium is applied to the surface part provided with said hydrophilic coating (6).
27. A urinary catheter assembly as claimed in claim 26, **characterized in that** said means comprises a film layer (55) of a material soluble by said swelling medium applied to said parts not provided with said hydrophilic coating.
28. A urinary catheter assembly as claimed in any of the preceding claims, **characterized in that** said package includes a bag (52) communicating with the catheter (1) for collection of urine.
29. A urinary catheter assembly as claimed in claim 22 or 23 and claim 28, **characterized in that** said ampoule (54, 54') is arranged in said bag.
30. A urinary catheter assembly as claimed in claim 25, **characterized in that** said ampoule is formed as a pouch (56) arranged in said cavity in extension of the proximal end of said catheter (58), said joint (62) being formed in an end of said pouch facing said proximal end.
31. A urinary catheter assembly as claimed in claim 22, **characterized in that** said ampoule is formed as a container (64, 71, 78, 82, 89, 95, 105) having relatively rigid walls.
32. A urinary catheter assembly as claimed in claim 31, **characterized in that** said outlet part is an open end (72) of said container (71), said closure member comprising a detachable external clamping device (75) for squeezing the walls of said cavity into sealing contact.
33. A urinary catheter assembly as claimed in claim 31, **characterized in that** said closure (65, 87, 90, 96) is openable by operation of an operation member (66, 84, 92, 99) without opening the catheter package.
34. A urinary catheter assembly as claimed in claim 33, **characterized in that** said closure member (87) comprises a plug-like closure which is removable from said ampoule (82) by operation of said operation member (84).
35. A urinary catheter assembly as claimed in claim 33, **characterized in that** said closure member comprises a membrane (80a, 90, 96) which is opened by rupturable by operation of said operation member.
36. A urinary catheter assembly as claimed in claim 35, **characterized in that** said operation member comprises a rod-like member (66) extending through said ampoule (64) and an end wall of said cavity and a gripping member (68) connected with said rod-like member outside said package.
37. A urinary catheter assembly as claimed in claim 31, **characterized in that** an end wall (104) of said cavity outside said proximal opening of the catheter (102) comprises a relatively rigid wall part, said container (105) being arranged outside the package in turnable relationship with said wall part (104) to allow said container to be turned between first and second positions, in which an outlet opening provid-

- ed in an end wall of the container (105) is sealingly separated from an opening provided in said rigid wall part (104) or brought into alignment with said opening to provide liquid flow communication from said container (105) into said cavity.
38. A urinary catheter assembly as claimed in claim 35, characterized in that said operation member (84, 92, 99) is connected with said ampoule (82, 89, 95) and comprises a rupturing device for rupturing said membrane.
39. A urinary catheter assembly as claimed in claims 31, characterized in that said operation member comprises two pivotally connected parts (98, 99) connected with said membrane (96) and an outlet member (97) of said catheter, respectively, the latter of said parts (99) being provided with a rupturing device (100) for rupturing said membrane, said parts (98, 99) being pivotable with respect to each other between a first inactive position and a second position, in which said membrane (96) can be ruptured by said rupturing device (100).
40. A urinary catheter assembly as claimed in any of the preceding claims, characterized in that said liquid swelling medium is selected from the group comprising an aqueous solution, an isotonic aqueous solution, an isotonic aqueous solution of sodium chloride and sterile water.
3. Blasenkatheter-Set nach Anspruch 2, **dadurch gekennzeichnet, daß** die Katheterpackung (7) aus zwei Folien bzw. Bögen (8, 9) aus einem gasundurchlässigen Filmmaterial ausgebildet ist, die durch eine gasundurchlässige Verbindung (10), welche das Kompartiment (12) und den Hohlraum (11) zur Aufnahme des Katheters (1) definiert, verbunden sind.
4. Blasenkatheter-Set nach Anspruch 3, **dadurch gekennzeichnet, daß** die Katheterpackung (7) allgemein längliche Form hat, wobei die Verbindung (10) derart angeordnet ist, daß sie den Hohlraum (11) zur Aufnahme des Katheters (1) in einer im wesentlichen linearen Ausrichtung festlegt.
5. Blasenkatheter-Set nach Anspruch 3 oder 4, **dadurch gekennzeichnet, daß** der Hohlraum selbst das Kompartiment bildet, um die Behandlung des Katheters unmittelbar nach dem Einführen des Schwellmediums in das Kompartiment zu bewirken, wobei die Packung dabei eine langandauernde Beibehaltung der friktionsarmen Oberfläche des Katheters in einer vorbehandelten Form, ermöglicht.
6. Blasenkatheter-Set nach Anspruch 3 oder 4, **dadurch gekennzeichnet, daß** die Verbindung (10) derart angeordnet ist, daß sie den Hohlraum (11) mit einem Querschnitt versieht, so daß er den Katheter (1) eng umgibt.
7. Blasenkatheter-Set nach einem der Ansprüche 3, 4 oder 6, **dadurch gekennzeichnet, daß** das Kompartiment (12) an einem Ende des Hohlraums (11) vorgesehen ist.
8. Blasenkatheter-Set nach Anspruch 7, **dadurch gekennzeichnet, daß** das flüssige Schwellmedium in einem in dem Kompartiment (12) angeordneten Speicherkörper (14) eingeschlossen ist.
9. Blasenkatheter-Set nach Anspruch 8, **dadurch gekennzeichnet, daß** die Katheterpackung einen Übergangsabschnitt (13) zwischen dem Hohlraum (11) und dem Kompartiment umfaßt, zur Aufnahme eines proximalen Auslasses und/oder Anschlußelementes (5) des Katheters (1).
10. Blasenkatheter-Set nach einem der Ansprüche 3 bis 9, **dadurch gekennzeichnet, daß** die Verbindung (10) eine Schweißverbindung ist.
11. Blasenkatheter-Set nach Anspruch 10, **dadurch gekennzeichnet, daß** die Schweißverbindung (10) einen Teil (15) umfaßt, der zwischen dem Kompartiment (12) und dem Hohlraum (11) als Abreißverbindung vorgesehen ist und eine Trennung des Kompartiments (12) von dem Hohlraum (11) nach

Patentansprüche

1. Blasenkatheter-Set mit wenigstens einem Blasenkatheter (1), der auf wenigstens einem Teil seiner Oberfläche eine hydrophile Oberflächenschicht (6) hat, die dazu vorgesehen ist, einen friktionsarmen Oberflächencharakter des Katheters zu erzeugen aufgrund der Behandlung mit einem flüssigen Schwell- bzw. Quellmedium vor Verwendung des Katheters und einer Katheterpackung (7, 16, 29, 34, 42, 46, 51, 51'), die einen Hohlraum (11, 18, 39, 48, 53) zur Aufnahme des Katheters (1, 58, 69) hat, **dadurch gekennzeichnet, daß** die Packung (7, 16, 29, 34, 42, 46, 51, 51') ein Kompartiment (12, 19, 25, 30, 35, 40, 47, 54, 54', 56, 64, 71, 78, 82) mit Wänden aus einem gasundurchlässigen Material hat, wobei das Kompartiment das flüssige Schwellmedium aufnimmt zum Bereitstellen eines gebrauchsfertigen Blasenkatheter-Sets.
2. Blasenkatheter-Set nach Anspruch 1, **dadurch gekennzeichnet, daß** die Katheterpackung (7, 16) insgesamt aus einem gasundurchlässigen Material hergestellt ist und daß das Kompartiment (12, 19) in Flüssigkeitsströmungsverbindung mit dem Hohlraum (11, 18) zur Aufnahme des Katheters, ist.

- der Übertragung des flüssigen Schwellmediums von dem Kompartiment an den Hohlraum zum Zwecke des Entnehmens des Katheters (1) aus der Packung (7), gestattet.
12. Blasenkatheter-Set nach Anspruch 10, **dadurch gekennzeichnet, daß** die Schweißverbindung (10) wenigstens einen Teil (10a) an dem gegenüber dem Kompartiment (12) entfernten Ende der Packung umfaßt, der eine Abschäl- bzw. Ablöseverbindung liefert, zur Trennung der Folien (8, 9) voneinander zum Zwecke des Entnehmens des Katheters (1) aus der Packung (7).
13. Blasenkatheter-Set nach Anspruch 2, **dadurch gekennzeichnet, daß** die Packung (16) einen ersten im allgemeinen röhrenförmigen Teil (17) umfaßt, der den Hohlraum (18) begrenzt, um den Katheter (1) eng zu umgeben, sowie einen zweiten im allgemeinen röhrenförmigen Teil (19), der das Kompartiment begrenzt.
14. Blasenkatheter-Set nach Anspruch 13, **dadurch gekennzeichnet, daß** der erste und der zweite röhrenförmige Teil (17, 19) integral aus einem länglichen, schlauchartigen Element ausgebildet sind, wobei einer seiner Endabschnitte aufgeweitet ist, um den zweiten röhrenförmigen Teil (19) zu bilden.
15. Blasenkatheter-Set nach Anspruch 14, **dadurch gekennzeichnet, daß** ein einen Bruch definierendes Segment (20) in dem schlauchartigen Element in einem Übergangsbereich zwischen dem ersten und dem zweiten röhrenförmigen Teil (17, 19) vorgesehen ist, um eine Trennung des Kompartiments (19) von dem Hohlraum (18) zur Entnahme des Katheters (1), zu gestatten.
16. Blasenkatheter-Set nach Anspruch 13, **dadurch gekennzeichnet, daß** der erste und der zweite röhrenförmige Teil (22, 23) getrennte Teile sind, die lösbar miteinander verbunden sind, um eine Trennung des Kompartiments (23) von dem Hohlraum zum Zwecke der Entnahme des Katheters (1) zu gestatten.
17. Blasenkatheter-Set nach einem der Ansprüche 13 bis 16, **dadurch gekennzeichnet, daß** das flüssige Schwellelement in einem in dem zweiten röhrenförmigen Teil (19, 23) angeordneten Speicherkörper (14) eingeschlossen ist.
18. Blasenkatheter nach einem der Ansprüche 13 bis 17, **dadurch gekennzeichnet, daß** der zweite röhrenförmige Teil (19) mit einem abnehmbaren Endverschlußteil (21) versehen ist.
19. Blasenkatheter-Set nach Anspruch 1, **dadurch gekennzeichnet, daß** das Kompartiment (25, 31, 35, 40, 47, 54, 54', 56, 64, 71, 78, 82, 89, 95, 105) von dem Hohlraum (39, 48, 53) zur Aufnahme des Katheters (1) getrennt ist, wobei das Schwellmedium bis zu der vorgesehenen Verwendung des Katheters in einem flüssigen Zustand in dem Kompartiment (25, 31, 35, 40, 47, 54, 54', 56, 64, 71, 78, 82, 89, 95, 105) eingeschlossen ist.
20. Blasenkatheter-Set nach Anspruch 19, **dadurch gekennzeichnet, daß** das Kompartiment (25, 31) durch einen Behälter gebildet ist, der um einen proximalen Teil (26) des Katheters (1) angeordnet ist, der nicht mit der hydrophilen Beschichtung (6) versehen ist, wobei der Katheter über abgedichtete Öffnungen (27, 28) durch den Behälter gelangt und wobei der Katheter (1) und der Behälter (25) in der Packung (29, 32) angeordnet sind, so daß der Katheter (1) durch den Behälter (25, 31) gezogen werden kann bei Entnahme des Katheters aus der Packung.
21. Blasenkatheter-Set nach Anspruch 19, **dadurch gekennzeichnet, daß** der Hohlraum und das Kompartiment durch getrennte Behältnisse (47, 48) aus Filmmaterial gebildet sind, die durch ein gemeinsames Folienelement (49) aus gasundurchlässigem Filmmaterial verschlossen werden, was mit den Behältnissen durch eine Verbindung verbunden ist, die in einem zwischen den Behältnissen (47, 48) angeordneten Bereich (50) des Folienelementes (49) eine relativ schwach haftende erste Abschälverbindung vorsieht, wobei die Verbindung entlang anderer Randteile der Behältnisse eine relativ stark haftende zweite Verbindung schafft, um eine Trennung des Folienelementes (49) von den Behältnissen (47, 48) in diesem Bereich zu ermöglichen, um eine Flüssigkeitsstromverbindung von dem Kompartiment (47) zu dem Hohlraum (48) zu liefern.
22. Blasenkatheter-Set nach Anspruch 19, **dadurch gekennzeichnet, daß** das Kompartiment durch eine Ampulle (35, 40, 54, 54', 56, 64, 71, 78, 82, 89, 95, 105) gebildet ist, die einen durch einen lösbaren Verschuß (55) verschlossenen Auslaßteil (37, 44) hat.
23. Blasenkatheter-Set nach Anspruch 22, **dadurch gekennzeichnet, daß** die Ampulle (35, 40, 54, 54', 56) zusammendrückbar und derart angeordnet ist, daß das Auslaßteil (37, 44) mit einer proximalen Öffnung des Katheters kommuniziert.
24. Blasenkatheter-Set nach Anspruch 22 oder 23, **dadurch gekennzeichnet, daß** die Ampulle (35, 40, 54, 54') zusammen mit dem Katheter (1) in der Packung (34, 42, 51, 51') angeordnet ist, wobei der Verschuß offenbar ist, ohne daß die Packung geöffnet

wird, um das Schwellmedium in behandelnden Kontakt mit wenigstens der hydrophilen Oberflächenschicht des Katheters (1) zu bringen.

25. Blasenkatheter-Set nach Anspruch 23 oder 24, **dadurch gekennzeichnet, daß** der Verschluß durch eine relativ schwach haftende Verbindung (38) gebildet ist, die durch Anwendung eines Drucks auf die Ampulle geöffnet werden kann, so daß das flüssige Schwellmedium durch den Katheter (1) und durch wenigstens eine Öffnung (4) an dessen distalem Ende in Richtung des Oberflächenteils mit der hydrophilen Beschichtung (6), fließen kann.
26. Blasenkatheter-Set nach einem der vorstehenden Ansprüche, **dadurch gekennzeichnet, daß** der Katheter (1) mit einer Einrichtung versehen ist, die verhindert, daß das Schwellmedium in Kontakt gelangt mit inneren oder äußeren Oberflächenteilen des Katheters, die nicht mit der hydrophilen Beschichtung (6) versehen sind, und zwar über einen Aktivierungszeitraum, während dem das Medium dem mit der hydrophilen Beschichtung (6) versehenen Oberflächenteil zugeführt wird.
27. Blasenkatheter-Set nach Anspruch 26, **dadurch gekennzeichnet, daß** die Einrichtung eine Filmschicht (55) aus einem Material umfaßt, das löslich ist durch das Schwellmedium, das den nicht mit der hydrophilen Beschichtung versehenen Teilen zugeführt wird.
28. Blasenkatheter-Set nach einem der vorstehenden Ansprüche, **dadurch gekennzeichnet, daß** die Packung einen Sack (52) beinhaltet, der mit dem Katheter (1) zum Zwecke des Sammeins von Urin, verbunden ist.
29. Blasenkatheter-Set nach Anspruch 22 oder 23 und Anspruch 28, **dadurch gekennzeichnet, daß** die Ampulle (54, 54') in dem Sack angeordnet ist.
30. Blasenkatheter-Set nach Anspruch 25, **dadurch gekennzeichnet, daß** die Ampulle als kleiner Beutel (56) ausgebildet ist, der in dem Hohlraum in Verlängerung des proximalen Endes des Katheters (58) angeordnet ist, wobei die Verbindung (62) in einem Ende des kleinen Beutels ausgebildet ist, das dem proximalen Ende gegenüberliegt.
31. Blasenkatheter-Set nach Anspruch 22, **dadurch gekennzeichnet, daß** die Ampulle als Behälter (64, 71, 78, 82, 89, 95, 105) mit relativ steifen bzw. festen Wänden ausgebildet ist.
32. Blasenkatheter-Set nach Anspruch 31, **dadurch gekennzeichnet, daß** der Auslaßteil ein offenes Ende (72) des Behälters (71) ist, wobei das Ver-

schlußelement eine abnehmbare äußere Klemmvorrichtung (75) zum Zusammenpressen der Wände des Hohlraums in dichtendem Kontakt, umfaßt.

33. Blasenkatheter-Set nach Anspruch 31, **dadurch gekennzeichnet, daß** der Verschluß (65, 87, 90, 96) zu öffnen ist durch Betätigung eines Betätigungselementes (66, 84, 92, 99) ohne Öffnen der Katheterpackung.
34. Blasenkatheter-Set nach Anspruch 33, **dadurch gekennzeichnet, daß** das Verschlußelement (87) einen pfropfenartigen Verschluß umfaßt, der von der Ampulle (82) entfernt ist durch Betätigung des Betätigungselementes (84).
35. Blasenkatheter-Set nach Anspruch 33, **dadurch gekennzeichnet, daß** das Verschlußelement eine Membran (80a, 90, 96) umfaßt, welche durch abbrechende Betätigung des Betätigungselementes offenbar ist.
36. Blasenkatheter-Set nach Anspruch 35, **dadurch gekennzeichnet, daß** das Betätigungselement ein stangenartiges Element (66) umfaßt, das sich durch die Ampulle (64) und eine Endwand des Hohlraums erstreckt, sowie ein Greiferelement (68), das mit dem stangenartigen Element außerhalb der Packung verbunden ist.
37. Blasenkatheter-Set nach Anspruch 31, **dadurch gekennzeichnet, daß** eine Endwand (104) des Hohlraums außerhalb der proximalen Öffnung des Katheters (102) ein relativ steifes Wandteil umfaßt, wobei der Behälter (105) außerhalb der Packung in drehbarer Relation zu dem Wandteil (104) angeordnet ist, so daß der Behälter zwischen einer ersten und einer zweiten Stellung drehbar ist, in der eine Auslaßöffnung in einer Endwand des Behälters (105) abdichtend getrennt ist von einer in dem steifen Wandteil (104) vorgesehenen Öffnung oder in Ausrichtung gebracht wird mit der Öffnung, um eine Flüssigkeitsstromverbindung von dem Behälter (105) in den Hohlraum vorzusehen.
38. Blasenkatheter-Set nach Anspruch 35, **dadurch gekennzeichnet, daß** das Betätigungselement (84, 92, 99) mit der Ampulle (82, 89, 95) verbunden ist und eine Abbrechvorrichtung zum Abbrechen der Membran umfaßt.
39. Blasenkatheter-Set nach Anspruch 31, **dadurch gekennzeichnet, daß** das Betätigungselement zwei schwenkbar verbundene Teile (98, 99) umfaßt, die mit der Membran (96) bzw. einem Auslaßelement (97) des Katheters verbunden sind, wobei das Letztere der Teile (99) mit einer Abbrechvorrichtung (100) zum Abbrechen der Membran versehen ist,

wobei die Teile (98, 99) relativ zueinander verschwenkbar sind zwischen einer ersten inaktiven Stellung und einer zweiten Stellung, in der die Membran (96) durch die Abbrechvorrichtung (100) abgebrochen werden kann.

40. Blasenkatheter-Set nach einem der vorstehenden Ansprüche, **dadurch gekennzeichnet, daß** das flüssige Schwellmedium ausgewählt ist aus der Gruppe, die umfaßt: eine wäßrige Lösung, eine isotonische wäßrige Lösung, eine isotonisch wäßrige Lösung aus Natriumchlorid und keimfreiem Wasser.

Revendications

1. Ensemble de cathéter urinaire comprenant au moins un cathéter urinaire (1) comprenant sur au moins une partie de sa surface une couche superficielle hydrophile (6) prévu pour produire un type de surface à faible frottement du cathéter par traitement avec un milieu gonflant liquide préalablement à l'emploi du cathéter et un emballage de cathéter (7, 16, 29, 34, 42, 46, 51, 51') comportant une cavité (11, 18, 39, 48, 53) pour logement du cathéter (1, 58, 69), **caractérisé en ce que** l'emballage (7, 16, 29, 34, 42, 46, 51, 51') inclut un compartiment (12, 19, 25, 30, 35, 40, 47, 54, 54', 56, 64, 71, 78, 82) comportant des parois d'un matériau imperméable aux gaz, ledit compartiment logeant ledit milieu gonflant liquide pour la formation d'un ensemble de cathéter prêt à l'emploi.
2. Ensemble de cathéter urinaire selon la revendication 1, **caractérisé en ce que** l'emballage de cathéter (7, 16) dans son intégralité est constitué d'un matériau imperméable au gaz et **en ce que** ledit compartiment (12, 19) est en communication d'écoulement liquide avec la cavité (11, 18) pour logement du cathéter.
3. Ensemble de cathéter urinaire selon la revendication 2, **caractérisé en ce que** l'emballage de cathéter (7) est formé à partir de deux feuilles (8, 9) de matériaux pelliculaires imperméable au gaz reliées entre elles par une jointure imperméable au gaz (10) définissant ledit compartiment (12) et la cavité (11) pour loger le cathéter (1).
4. Ensemble de cathéter urinaire selon la revendication 3, **caractérisé en ce que** l'emballage de cathéter (7) est d'une forme allongée générale, ladite jointure (10) étant agencée pour définir ladite cavité (11) afin de loger le cathéter (1) dans une orientation essentiellement linéaire.
5. Ensemble de cathéter urinaire selon la revendica-

tion 3 ou 4, **caractérisé en ce que** ladite cavité constitue elle-même ledit compartiment pour effectuer ledit traitement du cathéter immédiatement après l'introduction dudit milieu gonflant dans ledit compartiment, ledit emballage permettant par cet effet une conservation de longue durée de la surface à faible frottement du cathéter en une forme pré-traitée.

6. Ensemble de cathéter urinaire selon la revendication 3 ou 4, **caractérisé en ce que** ladite jointure (10) est agencée pour doter ladite cavité (11) d'une coupe transversale entourant étroitement le cathéter (1).
7. Ensemble de cathéter urinaire selon l'une quelconque des revendications 3, 4 ou 6, **caractérisé en ce que** ledit compartiment (12) est formé à une extrémité de ladite cavité (11).
8. Ensemble de cathéter urinaire selon la revendication 7, **caractérisé en ce que** ledit milieu gonflant liquide est confiné dans un corps de stockage (14) agencé dans ledit compartiment (12).
9. Ensemble de cathéter urinaire selon la revendication 8, **caractérisé en ce que** l'emballage de cathéter inclut une section transitionnelle (13) entre ladite cavité (11) et ledit compartiment pour logement d'un élément connecteur et/ou de sortie proximale (5) du cathéter (1).
10. Ensemble de cathéter urinaire selon l'une quelconque des revendications 3 à 9, **caractérisé en ce que** ladite jointure (10) est une jointure par soudure.
11. Ensemble de cathéter urinaire selon la revendication 10, **caractérisé en ce que** ladite jointure par soudure (10) comprend une partie (15) disposée entre ledit compartiment (12) et ladite cavité (11) sous la forme d'une jointure déchirable permettant la séparation dudit compartiment (12) de ladite cavité (11) après transfert dudit milieu gonflant liquide dudit compartiment vers ladite cavité pour retrait du cathéter (1) de l'emballage (7).
12. Ensemble de cathéter urinaire selon la revendication 10, **caractérisé en ce que** ladite jointure par soudure (10) comprend au moins une partie (10a) à l'extrémité de l'emballage éloigné dudit compartiment (12) procurant une jointure arrachable pour séparer lesdites feuilles (8, 9) l'une de l'autre pour retrait dudit cathéter (1) de l'emballage (7).
13. Ensemble de cathéter urinaire selon la revendication 12, **caractérisé en ce que** ledit emballage (16) comprend une première partie généralement tubulaire (17) définissant ladite cavité (18) pour entourer

étroitement le cathéter (1) et une seconde partie généralement tubulaire (19) définissant ledit compartiment.

14. Ensemble de cathéter urinaire selon la revendication 13, **caractérisé en ce que** lesdites première et seconde parties tubulaires (17, 19) sont formées solidairement à partir d'un élément du type tuyau allongé, une section d'extrémité duquel est expansé pour constituer ladite seconde partie tubulaire (19).
15. Ensemble de cathéter urinaire selon la revendication 14, **caractérisé en ce qu'un** segment définissant une fracture (20) est formé dans ledit élément du type tuyau dans une région transitionnelle entre lesdites première et seconde parties tubulaires (17, 19) pour permettre la séparation dudit compartiment (19) de ladite cavité (18) pour retrait du cathéter (1).
16. Ensemble de cathéter urinaire selon la revendication 13, **caractérisé en ce que** lesdites première et seconde parties tubulaires (22, 23) sont des parties séparées qui sont reliées entre elles de manière détachable pour permettre la séparation dudit compartiment (23) de ladite cavité pour retrait du cathéter (1).
17. Ensemble de cathéter urinaire selon l'une quelconque des revendications 13 à 16, **caractérisé en ce que** ledit élément gonflant liquide est confiné dans un corps de stockage (14) agencé dans ladite seconde partie tubulaire (19, 23).
18. Ensemble de cathéter urinaire selon l'une quelconque des revendications 13 à 17, **caractérisé en ce que** ladite seconde partie tubulaire (19) est pourvue d'un élément de fermeture d'extrémité détachable (21).
19. Ensemble de cathéter urinaire selon la revendication 1, **caractérisé en ce que** ledit compartiment (25, 31, 35, 40, 47, 54, 54', 56, 64, 71, 78, 82, 89, 95, 105) est séparé de la cavité (39, 48, 53) pour logement du cathéter (1), ledit milieu gonflant étant confiné dans ledit compartiment (25, 31, 35, 40, 47, 54, 54', 56, 64, 71, 78, 82, 89, 95, 105) dans un état liquide jusqu'à l'utilisation prévue du cathéter.
20. Ensemble de cathéter urinaire selon la revendication 19, **caractérisé en ce que** ledit compartiment (25, 31) est formé d'un conteneur agencé autour d'une partie proximale (26) dudit cathéter (1) non pourvu dudit revêtement hydrophile (6), ledit cathéter passant à travers ledit conteneur via des ouvertures scellées (27, 28), ledit cathéter (1) et ledit conteneur (25) étant agencés dans ledit emballage (29,

32) pour permettre que ledit cathéter (1) soit retiré à travers ledit conteneur (25, 31) par retrait du cathéter de l'emballage.

21. Ensemble de cathéter urinaire, selon la revendication 19, **caractérisé en ce que** ladite cavité et ledit compartiment sont formés de conteneurs séparés (47, 48) de matériau pelliculaire fermé par un élément de feuille commun (49) d'un matériau pelliculaire imperméable au gaz relié auxdits conteneurs par une jointure qui dans une région (50) dudit élément de feuille (49) agencé entre lesdits conteneurs (47, 48) procure une première jointure arrachable à adhérence relativement faible, ladite jointure procurant le long des autres parties de bord desdits conteneurs une seconde jointure à adhérence relativement forte pour permettre la séparation dudit élément de feuille (49) desdits conteneurs (47, 48) dans ladite région afin de permettre une communication d'écoulement liquide dudit compartiment (47) à ladite cavité (48).
22. Ensemble de cathéter urinaire selon la revendication 19, **caractérisé en ce que** ledit compartiment est formé d'une ampoule (35, 40, 54, 54', 56, 64, 71, 78, 82, 89, 95, 105) comprenant une partie de sortie (37, 44) fermée par une fermeture libérable (55).
23. Ensemble de cathéter urinaire selon la revendication 22, **caractérisé en ce que** ladite ampoule (35, 40, 54, 54', 56) est compressible et agencée avec ladite partie de sortie (37, 44) communiquant avec une ouverture proximale dudit cathéter.
24. Ensemble de cathéter urinaire selon la revendication 22 ou 23, **caractérisé en ce que** ladite ampoule (35, 40, 54, 54') est agencée avec ledit cathéter (1) dans ledit emballage (34, 42, 51, 51'), ladite fermeture étant ouvrable sans ouverture dudit emballage pour amener ledit milieu gonflable en contact de traitement avec au moins ladite couche superficielle hydrophile du cathéter (1).
25. Ensemble de cathéter urinaire selon la revendication 23 ou 24, **caractérisé en ce que** ladite fermeture est formée d'une jointure à adhérence relativement faible (38), qui peut être ouverte à travers l'application d'une pression sur ladite ampoule pour permettre audit milieu gonflant liquide de s'écouler à travers le cathéter (1) et à travers au moins une ouverture (15) au niveau de sa partie distale vers la partie de surface comportant ledit revêtement hydrophile (6).
26. Ensemble de cathéter urinaire selon l'une quelconque des revendications précédentes, **caractérisé en ce que** le cathéter (1) est pourvu de moyen em-

- pêchant ledit milieu gonflable de venir en contact avec des parties de surface interne ou externe du cathéter non pourvu dudit revêtement hydrophile (6) pendant une période d'activation durant laquelle ledit milieu est appliqué à la partie de surface pourvue dudit revêtement hydrophile (6) 5
27. Ensemble de cathéter urinaire selon la revendication 2, **caractérisé en ce que** ledit moyen comprend une couche pelliculaire (55) d'un matériau soluble par ledit milieu gonflant appliqué auxdites parties non pourvues dudit revêtement hydrophile. 10
28. Ensemble de cathéter urinaire selon l'une quelconque des revendications précédentes, **caractérisé en ce que** ledit emballage inclut un sac (52) communicant avec le cathéter (1) pour recueil d'urine. 15
29. Ensemble de cathéter urinaire selon la revendication 22 ou 23 et la revendication 28, **caractérisé en ce que** ladite ampoule (54, 54') est disposée dans ledit sac. 20
30. Ensemble de cathéter urinaire selon la revendication 25, **caractérisé en ce que** ladite ampoule est formée sous forme de sachet (56) disposé dans ladite cavité en extension de l'extrémité proximale dudit cathéter (58), ladite jointure (62) étant formée dans une extrémité dudit sachet en regard de ladite extrémité proximale. 25 30
31. Ensemble de cathéter urinaire selon la revendication 22, **caractérisé en ce que** ladite ampoule est formée sous forme de conteneur (64, 71, 78, 82, 89, 95, 105) comportant des parois relativement rigides. 35
32. Ensemble de cathéter urinaire selon la revendication 31, **caractérisé en ce que** ladite partie de sortie est une extrémité ouverte (72) dudit conteneur (71), ledit élément de fermeture comprenant un dispositif de serrage externe détachable (75) pour comprimer les parois de ladite cavité en contact d'étanchéité. 40
33. Ensemble de cathéter urinaire selon la revendication 31, **caractérisé en ce que** ladite fermeture (65, 87, 90, 96) est ouvrable par l'action d'un élément fonctionnel (66, 84, 90, 96) sans ouverture de l'emballage de cathéter. 45
34. Ensemble de cathéter urinaire selon la revendication 33, **caractérisé en ce que** ledit élément de fermeture (87) comprend une fermeture du type bouchon qui peut être enlevée de ladite ampoule (82) par l'action dudit élément fonctionnel (84). 50 55
35. Ensemble de cathéter urinaire selon la revendication 33, **caractérisé en ce que** ledit élément de fermeture comprend une membrane (80a, 90, 96) qui est ouverte par rupture sous l'action dudit élément fonctionnel.
36. Ensemble de cathéter urinaire selon la revendication 35, **caractérisé en ce que** ledit élément fonctionnel comprend un élément du type tige (66) s'étendant à travers ladite ampoule (64) et une paroi d'extrémité de ladite cavité et un élément de saisie (68) relié audit élément de type tige à l'extérieur dudit emballage.
37. Ensemble de cathéter urinaire selon la revendication 31, **caractérisé en ce qu'une** paroi d'extrémité (104) de ladite cavité à l'extérieur de ladite ouverture proximale du cathéter (102) comprend une partie de paroi relativement rigide, ledit conteneur (105) étant disposé à l'extérieur de l'emballage en relation tournable par ladite partie de paroi (104) pour permettre que ledit conteneur soit tourné entre des première et seconde positions, dans lesquelles une ouverture de sortie ménagée dans une paroi d'extrémité du conteneur (105) est séparée sous étanchéité d'une ouverture ménagée dans ladite partie de paroi de rigide (104) ou amenée en alignement avec ladite ouverture pour permettre une communication d'écoulement liquide dudit conteneur (105) dans ladite cavité.
38. Ensemble de cathéter urinaire selon la revendication 35, **caractérisé en ce que** ledit élément fonctionnel (84, 92, 99) est relié à ladite ampoule (82, 89, 95) et comprend un dispositif de rupture destiné à rompre ladite membrane.
39. Ensemble de cathéter urinaire selon la revendication 31, **caractérisé en ce que** ledit élément fonctionnel comprend deux parties reliées en pivotement (98, 99) reliées à ladite membrane (96) et un élément de sortie (97) dudit cathéter, respectivement, la dernière desdites parties (99) étant pourvue d'un dispositif de rupture (100) destinée à rompre ladite membrane, lesdites parties (98, 99) étant pivotables l'une par rapport à l'autre entre une première position inactive et une seconde position dans laquelle ladite membrane (96) peut être rompue par le dispositif de rupture (100).
40. Ensemble de cathéter urinaire selon l'une quelconque des revendications précédentes, **caractérisé en ce que** ledit milieu gonflant liquide est choisi dans le groupe comprenant une solution aqueuse, une solution aqueuse isotonique, une solution aqueuse isotonique de chlorure de sodium et de l'eau stérile.

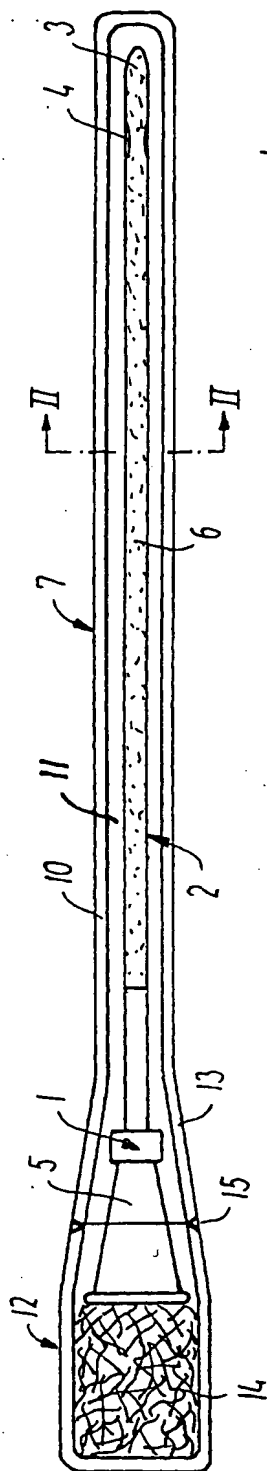


FIG. 1



FIG. 2

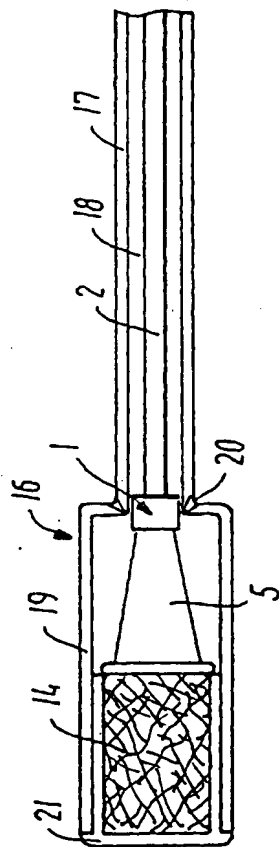


FIG. 4

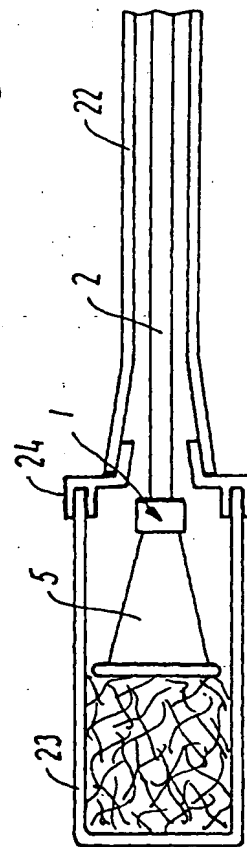


FIG. 6

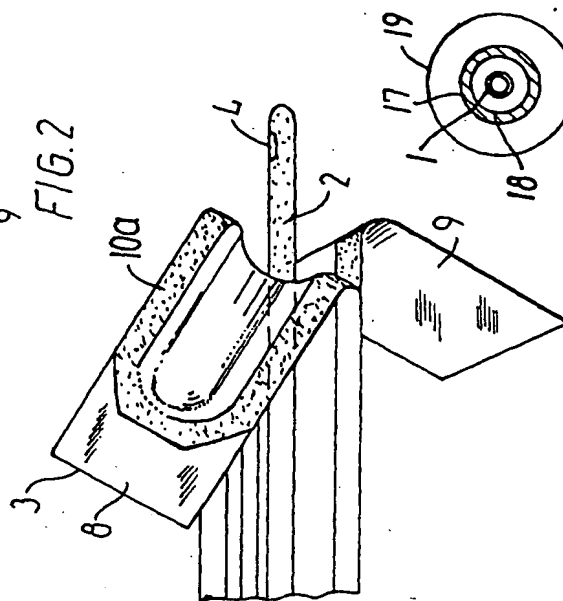


FIG. 3




FIG. 5

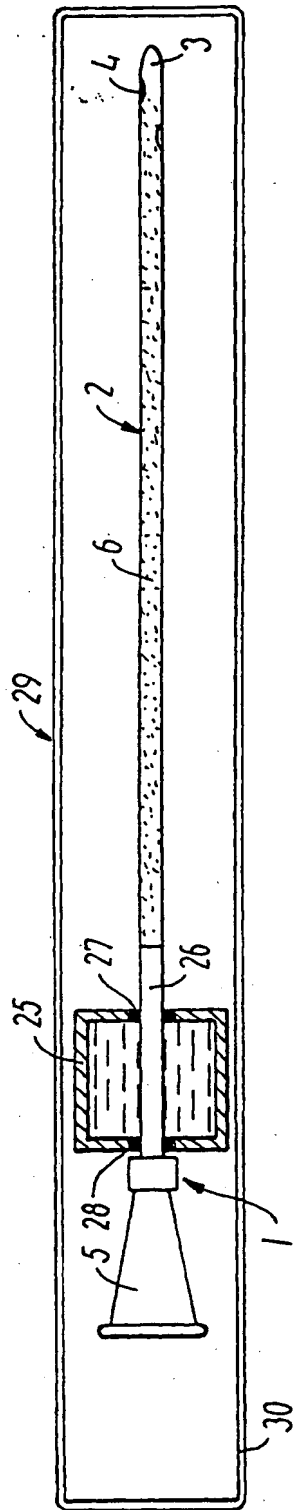


FIG. 7

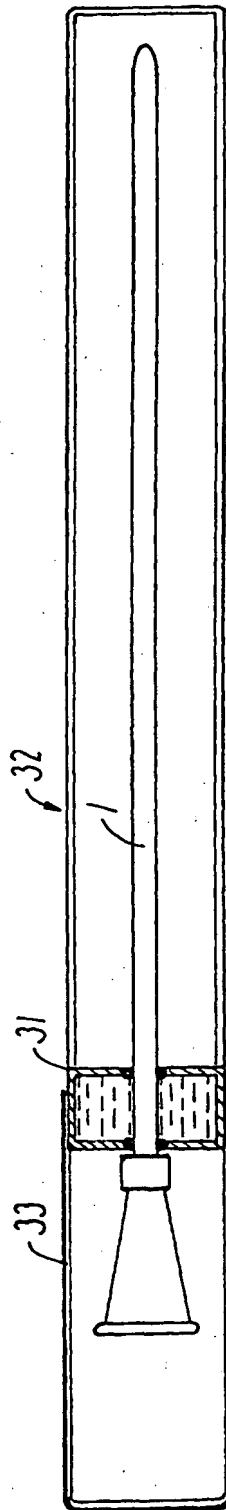


FIG. 8

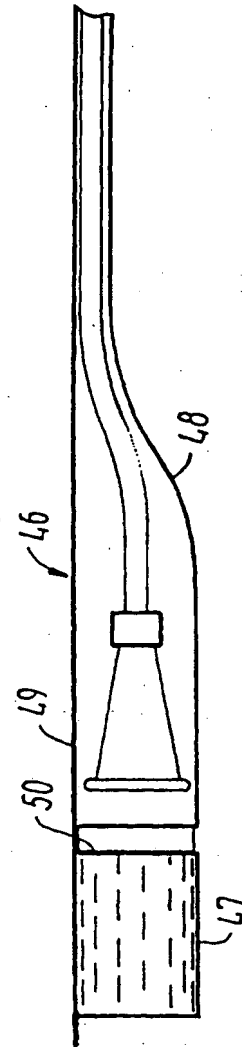


FIG. 11

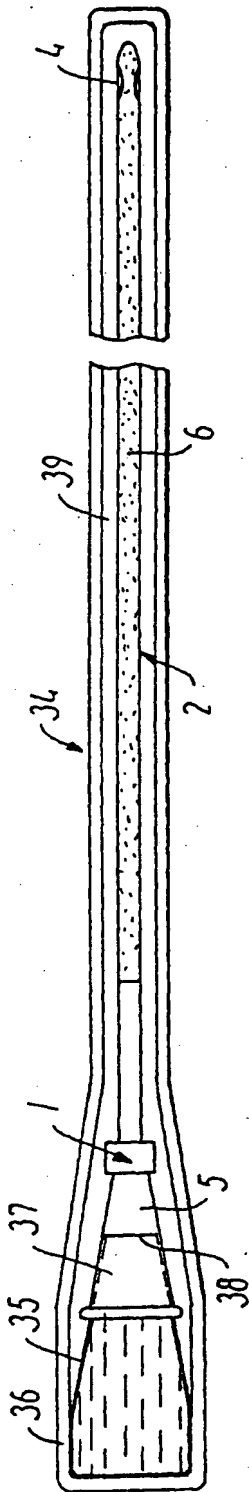


FIG. 9

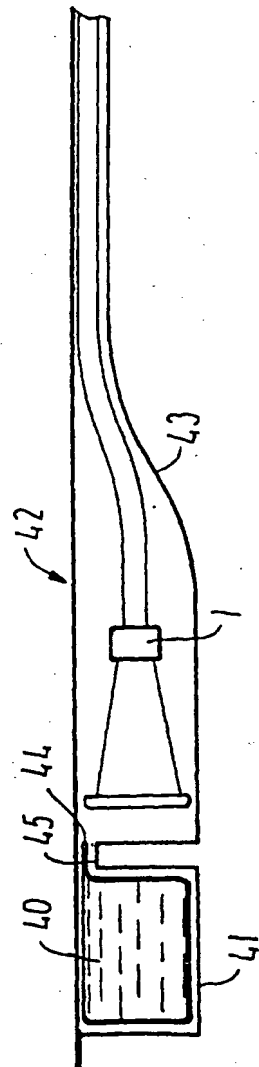


FIG. 10




FIG. 13

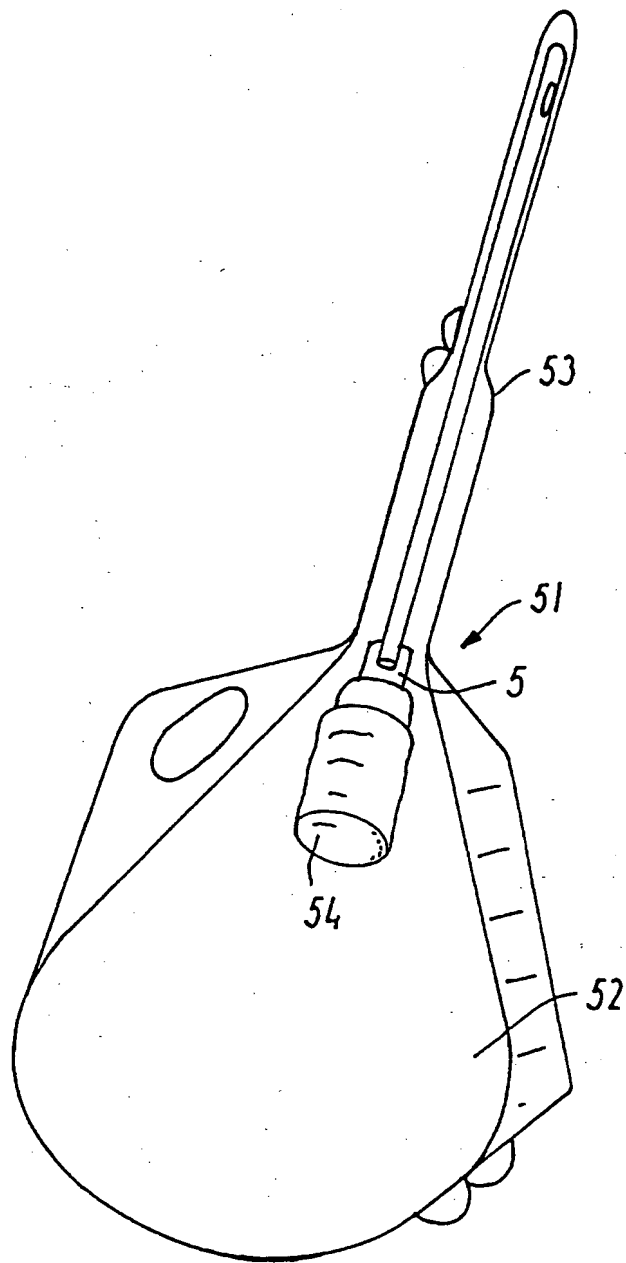


FIG. 12

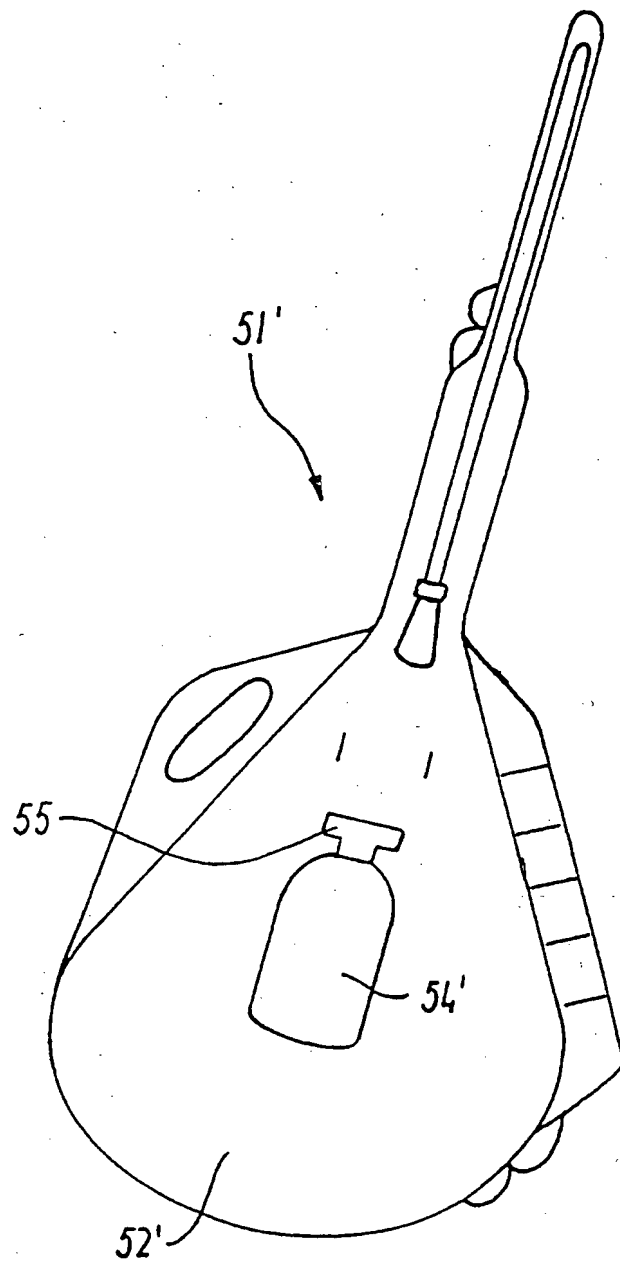


FIG. 14

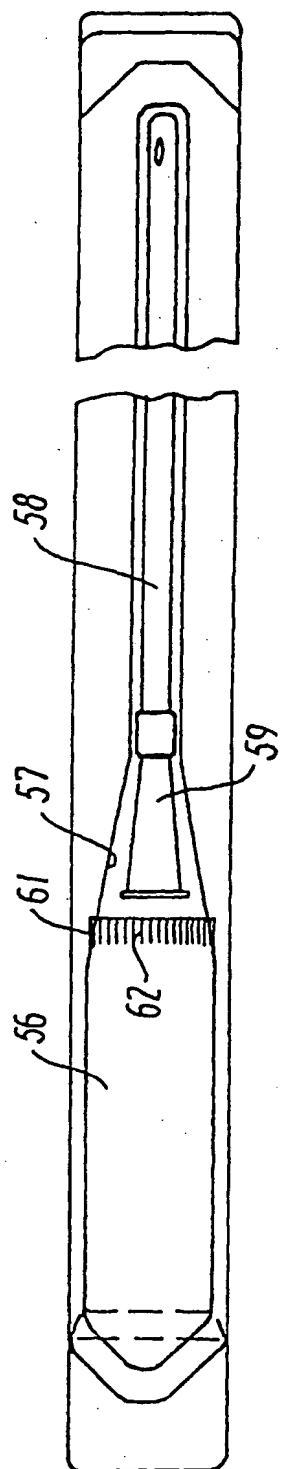


FIG. 15

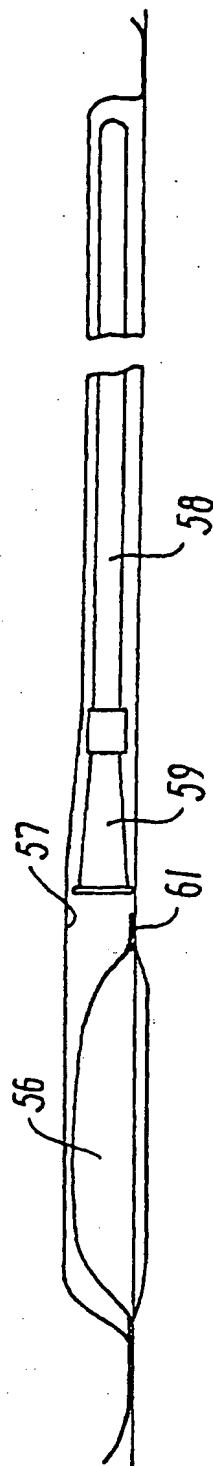
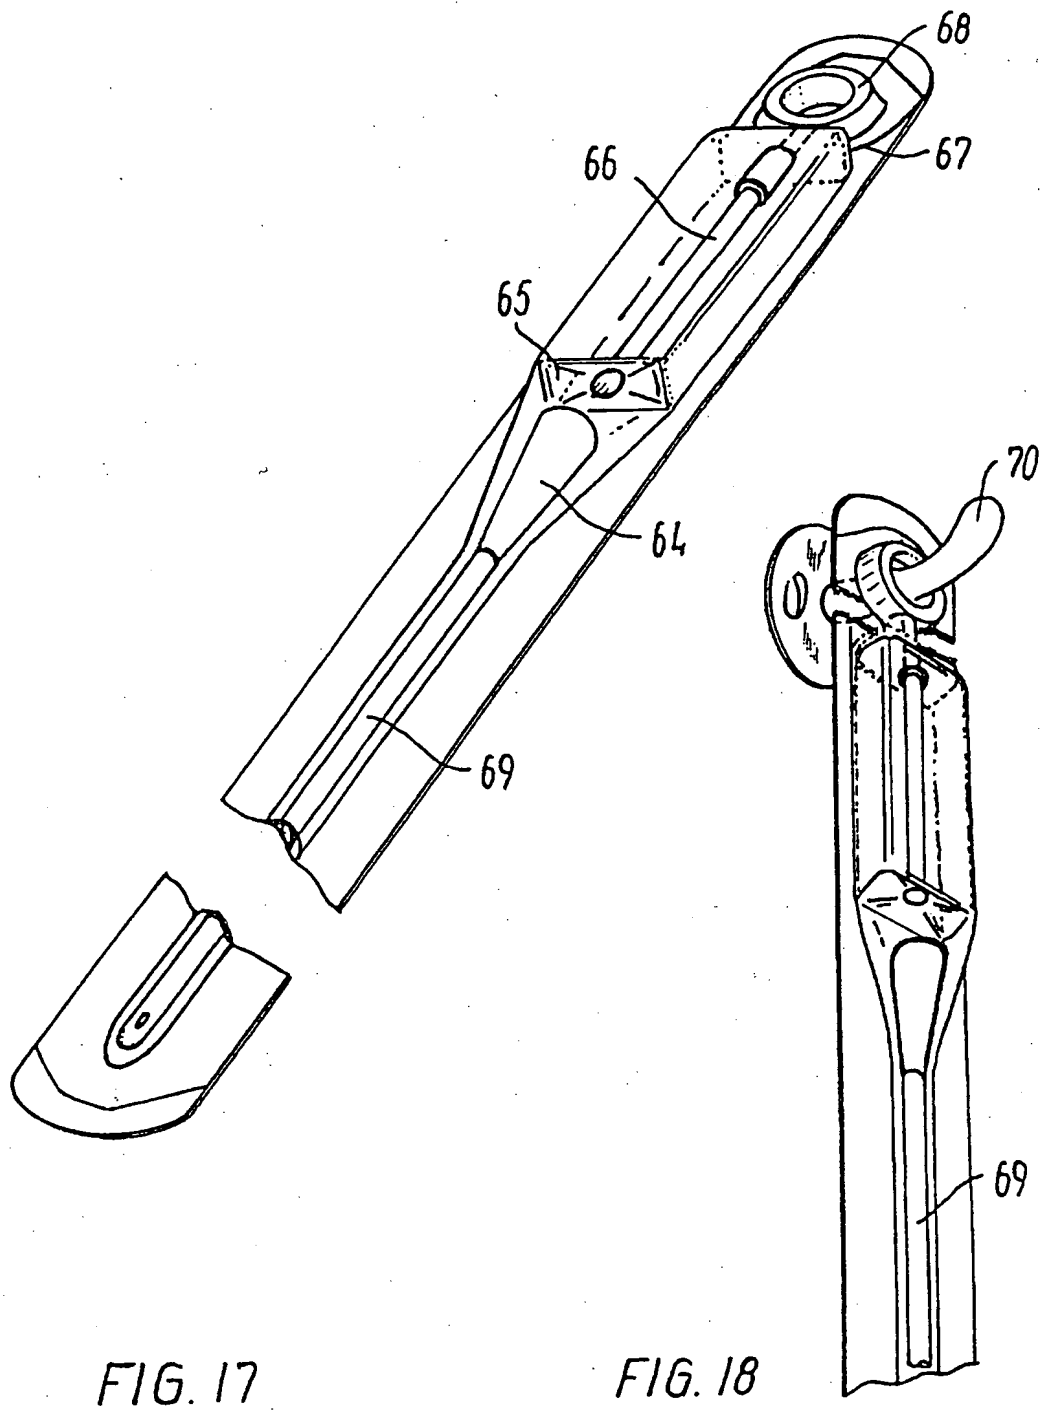
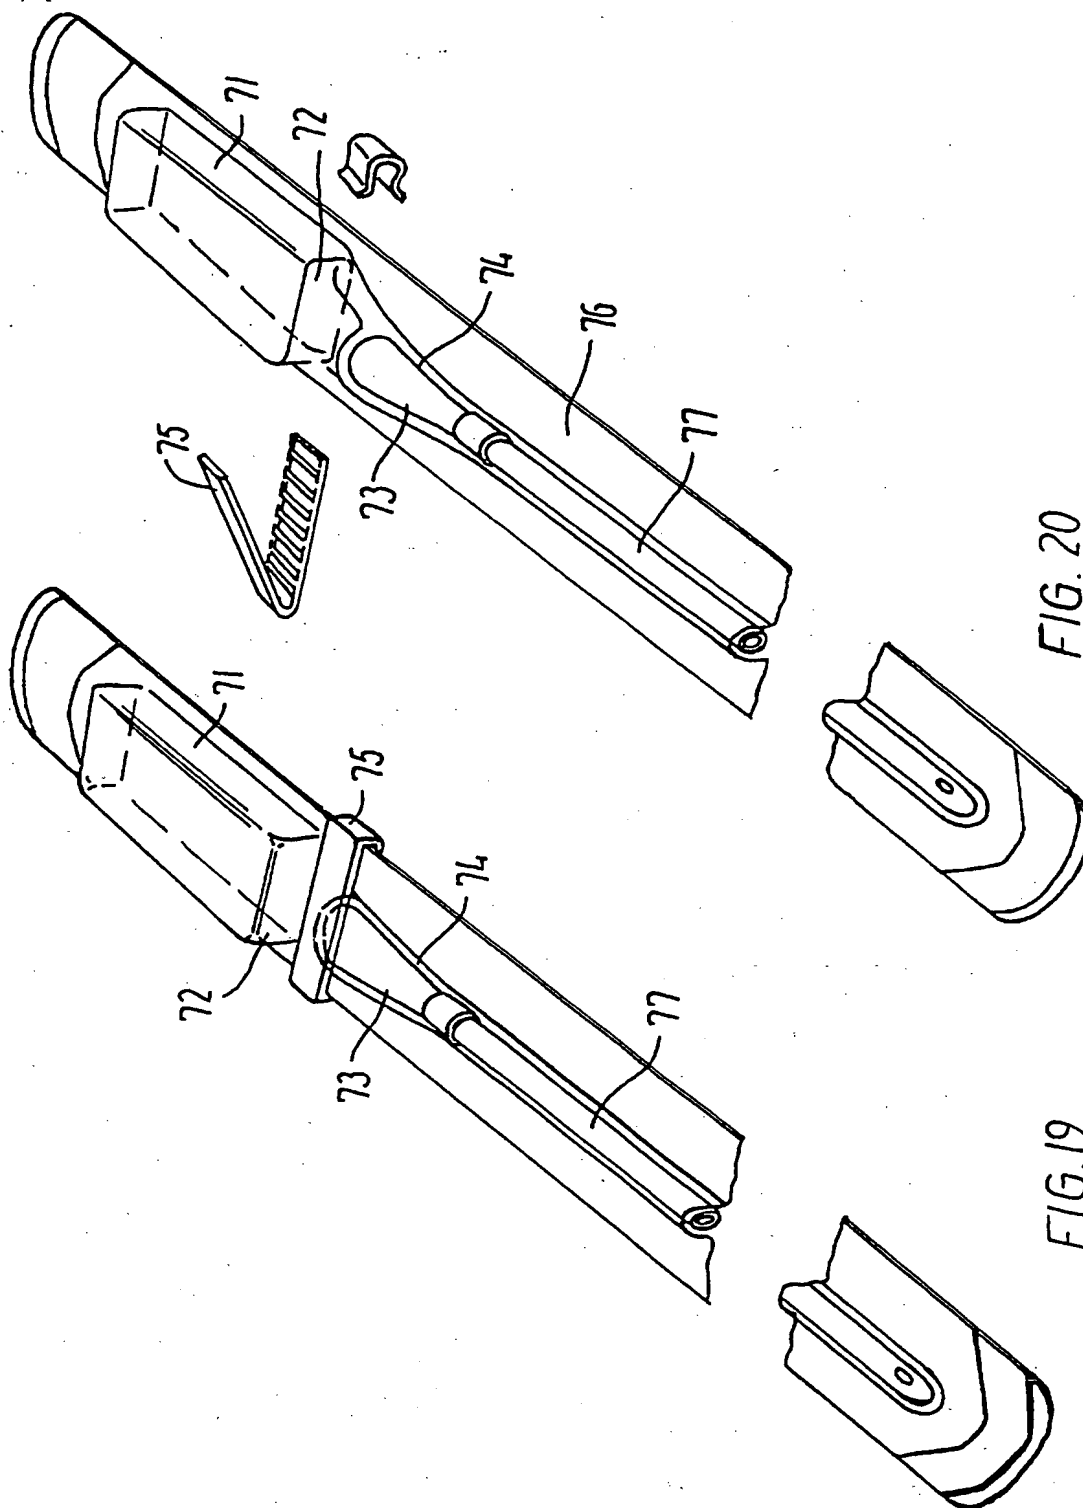
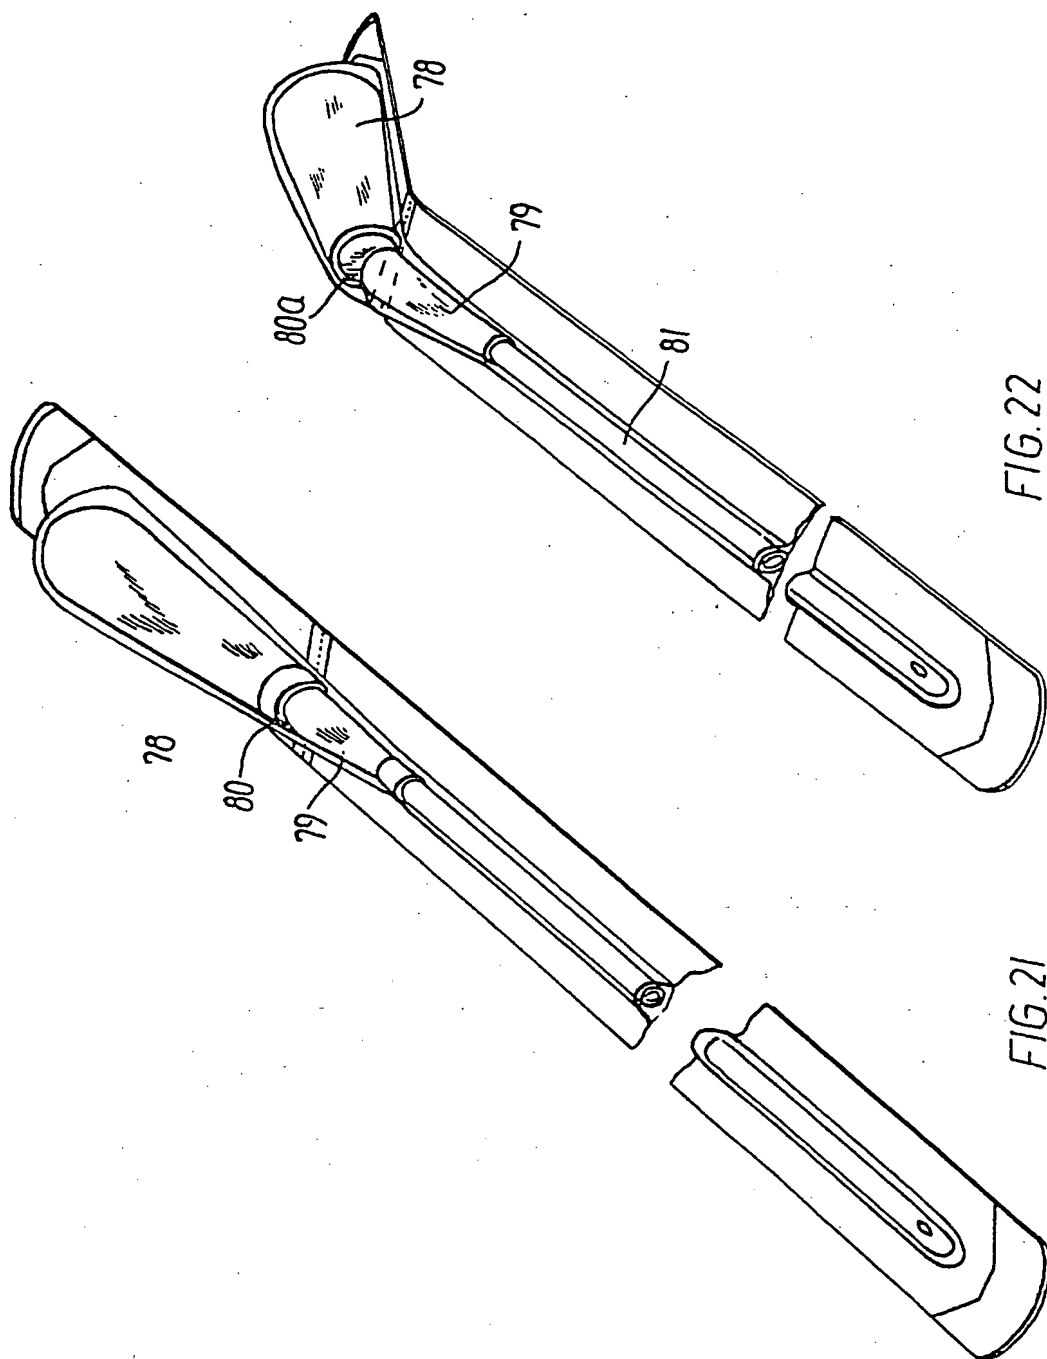


FIG. 16







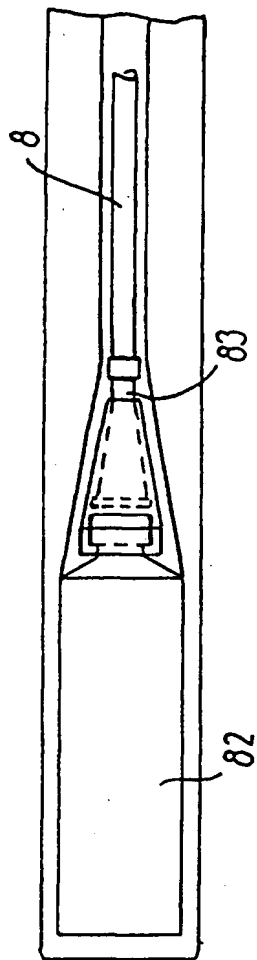


FIG. 23

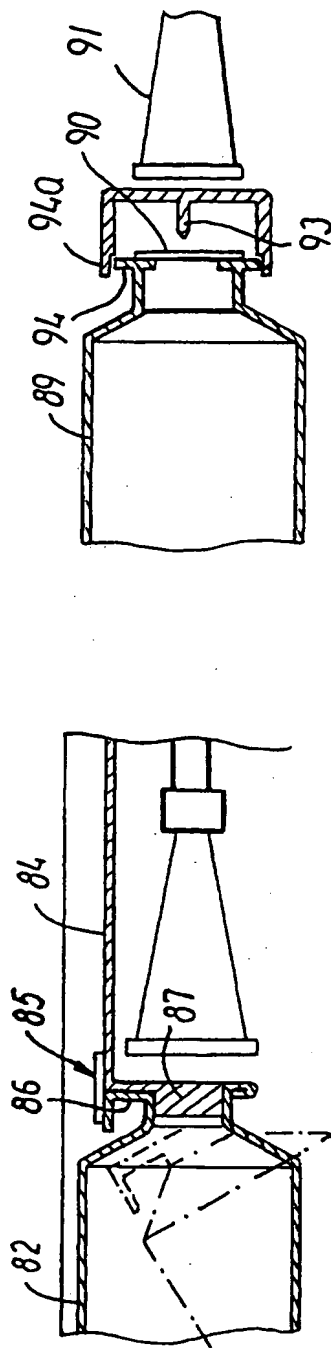


FIG. 24



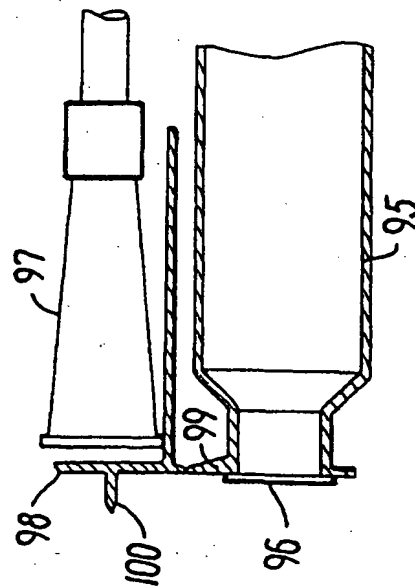


FIG. 25

FIG. 26

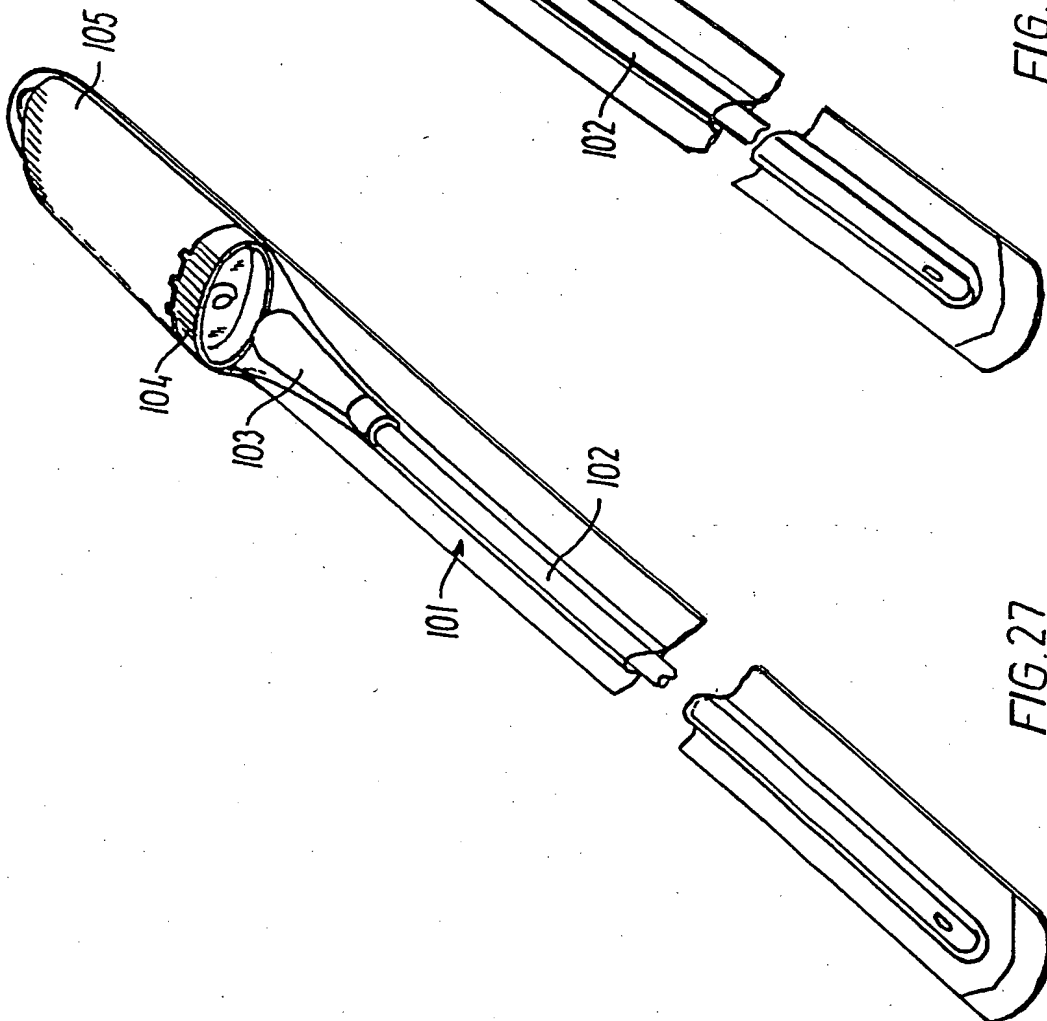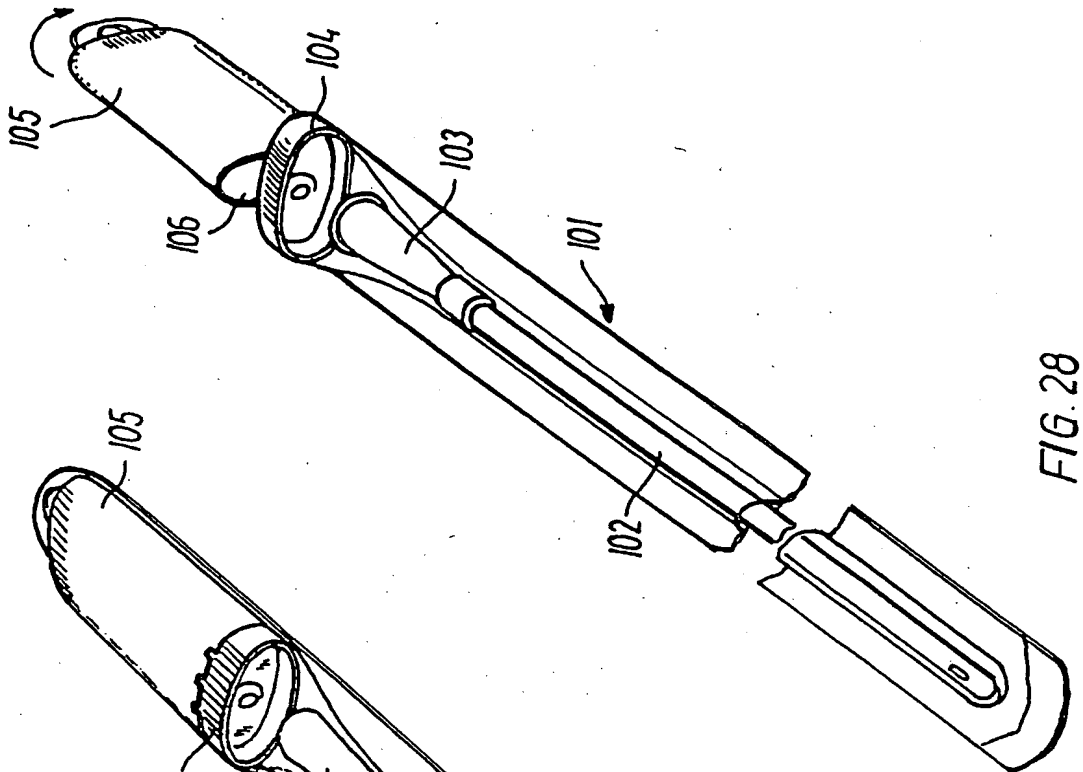

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.